

Slide Mounts

Complete Slide Mount

Item No.	Placement	Drilling Required	Frequency	Weight	Height	Width	Depth
SS-100	Under dash or any convenient location	Yes	Up to 512 MHz	1.8 lbs.	1.5"	6.0"	6.75"

Features

- Mobile radio mount offering quick insertion and removal of radio
- Connection to battery and antenna are made by sliding radio into place and disconnection by removing radio
- Includes mount, brackets and all required connectors
- All leads have terminals or connectors attached

Vehicle Base

Item No.	Placement	Drilling Required	Frequency	Antenna Connector	Weight	Height	Width	Depth
SS-101	Under dash or any convenient location	Yes	Up to 512 MHz	PF-249 (UHF Female)	0.5 lbs.	1.0"	4.25"	4.75"

Features

- Heavy gauge steel for construction long-term durability
- Black powdercoat finish for maximum corrosion resistance
- Includes mount base, attachment plate and all required connectors
- Battery and accessory leads are pre-wired to a fully enclosed terminal block for easy, safe wiring
- All leads have terminals or connectors attached
- Extra vehicle base to mount radio in additional vehicles

Radio Brackets

Item No.	Placement	Drilling Required	Frequency	Antenna Connector	Weight	Height	Width	Depth
SS-103	Attaches to most radios	No	Up to 512 MHz	PF-259 (UHF Male)	1.5 lbs.	1.5"	6.0"	6.75"

Features

- Includes mount base, attachment plate and all required connectors
- Power and ground leads are terminated at the back of the bracket
- All accessory leads supplied have terminals or connectors attached
- Radio bracket to allow use of an alternate radio in the same vehicle

Angled Mounting Plate

Item No.	Placement	Drilling Required	Weight	Height	Width	Depth
SS-106	Under dash or any convenient location	Yes	0.5 lbs.	2.0"	4.0"	4.0"

Features

- Heavy gauge steel construction for long-term durability
- Black powdercoat finish for maximum corrosion resistance
- Replaces flat mounting plate on vehicle base to provide a 20° fore/aft tilt from mounting surface

Accessory Contact Kit

Item No.	Placement	Weight
SS-102	For use with <i>Complete Slide Mount</i> (Item No. SS-100) to increase the number of unshielded contacts from four to six	0.5 lbs.

Features

- Includes two pins and sockets with wiring

SDI Slide Mount Brackets

Item No.	Placement	Drilling Required	Swivel	Weight	Height	Width	Depth
SDI 500	Adjustable Slide Mount bracket that can be tilted at an angle of 0° to 50°	Yes	Yes - 50° swivel when used with any <i>SDI Slide Mount</i>	1.14 lbs.	2.5"	4.5"	5.25"
SDI 560	Slide Mount bracket that can be tilted at fixed 45° angle	Yes	Yes - 50° swivel when used with any <i>SDI Slide Mount</i>	0.38 lbs.	2.75"	4.25"	5.0"
SDI 570	Slide Mount bracket that can be tilted at fixed 20° angle	Yes	Yes - 50° swivel when used with any <i>SDI Slide Mount</i>	0.46 lbs.	3.0"	4.5"	5.0"

Features

- Low profile design; Supports both Scientific Dimension (SDI) and Gamber-Johnson slide mounts
- Placement for all *SDI Slide Mounts Brackets* are under the dash or any convenient location
- There is **no swivel capability** when used with any Gamber-Johnson slide mount




Shown: SS-100




Shown: SS-101



Shown: SS-103

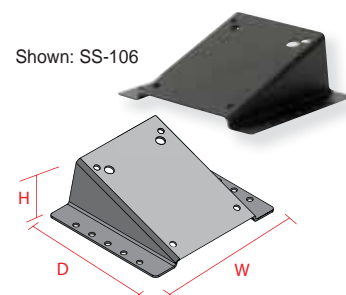


Shown: SS-106

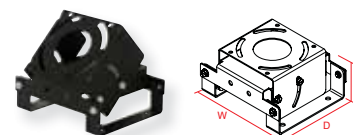

Shown: SDI 500



Shown: SDI 560

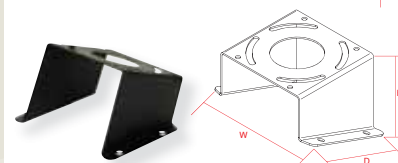

Shown: SDI 570