

INSTALLATION INSTRUCTIONS

Product 7160-1105

Revision
Rev.A

Form INST-821


FLAT SURFACE MOUNT

Printing Spec:PS-001

The 7160-1105 flat surface mount is designed to be used on flat surfaces and mount either a Gamber-Johnson pole or motion attachment. Mounting instructions specific to the poles or motion attachments will ship with the individual devises.

Mounting the flat surface mount:

- 1. First mount the assembly or components being attached to the flat surface mount. Place the full assembly on the flat surface to make sure there is enough room for the full assembly in the desired location.
- 2. Verifiy the bottom surface (where the mount is being attched) is clear so nothing is damaged when drilling the attachment holes.
- 3. Mark the four mounting hole locations on the flat surface where the mount is going to be attached.
- 4. Drill a 13/32" hole at each marked location.
- 5. Attach the surface mount to the flat surface using the 3/8" hex bolts, backup plates, washers, and lock nuts provided in hardware bag 7120-0811.

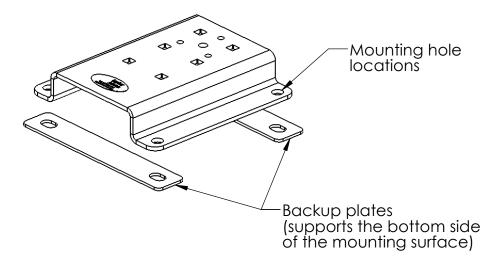

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.