



# INSTALLATION INSTRUCTIONS


<b><u>Product</u></b> 7110-1325, 7110-1326 WELDED GJ TO ZIRKONA ADAPTOR PLATES	<b><u>Revision</u></b> Rev A	<b><u>Form</u></b> INST-956 <b>Printing Spec:</b> PS-001
--	---------------------------------	--

The welded GJ to Zirkona adaptor plates are designed to mount Zirkona product to either a flat surface (7110-1325), or a pole mount (7110-1326).

*\*Loctite EA9460 or EA9461 EPOXY is the recommended thread locker for all threaded joints on the Zirkona products.*


## Installing mount 7110-1325

The mount can be installed on any flat surface as pictured below. Use 3/6-16 carriage bolts, washers and nuts supplied in the hardware bag. You may have to field drill holes in the desired location.

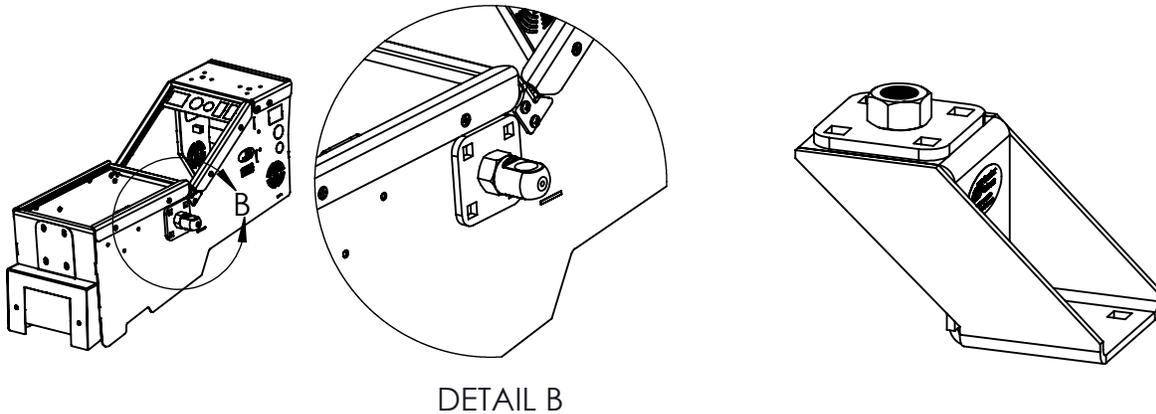

## Installing mount 7110-1326

The mount can be installed as pictured below with the supplied hardware.

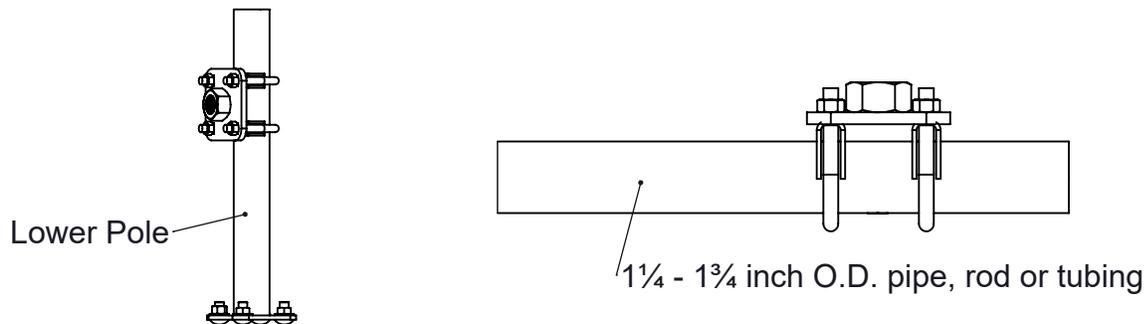

### Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 20XX Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

**Optional accessory**

The orientation of the joiner body to the threaded bases can be changed with the use of the Threaded Pivot Pin (18834).

