


INSTALLATION INSTRUCTIONS

ProductRevisionForm7160-1514Rev AINST-973

BASE 2019+ TOYOTA RAV 4 Printing Spec: PS-001

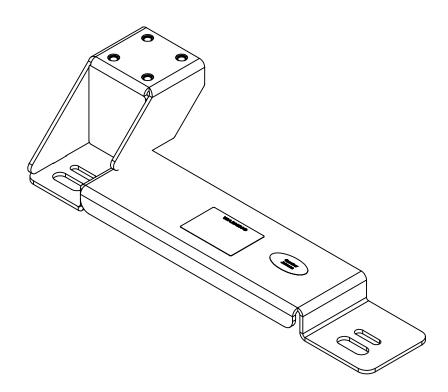

INSTALLATION:

- 1.Remove the front seat bolts of the passenger seat using a 16 mm socket.
- 2.Lift the seat up and slide the base such the floor holes match the slots in the base.
- 3. Re-install the front seat bolts and tighten them.
- 4. Attach pole using 3/8-16 bolts supplied in 7120-0215 Hardware Bag.

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2020 Gamber-Johnson, LLC