INSTALLATION INSTRUCTIONS

| Product	Revision	Form
7160-1573	A	INST-1014
Description: In-Console Printer mount upgrade kit		**Printing Spec:** PS-001

Locking lid

MIC PEMS

3" Mounting Space
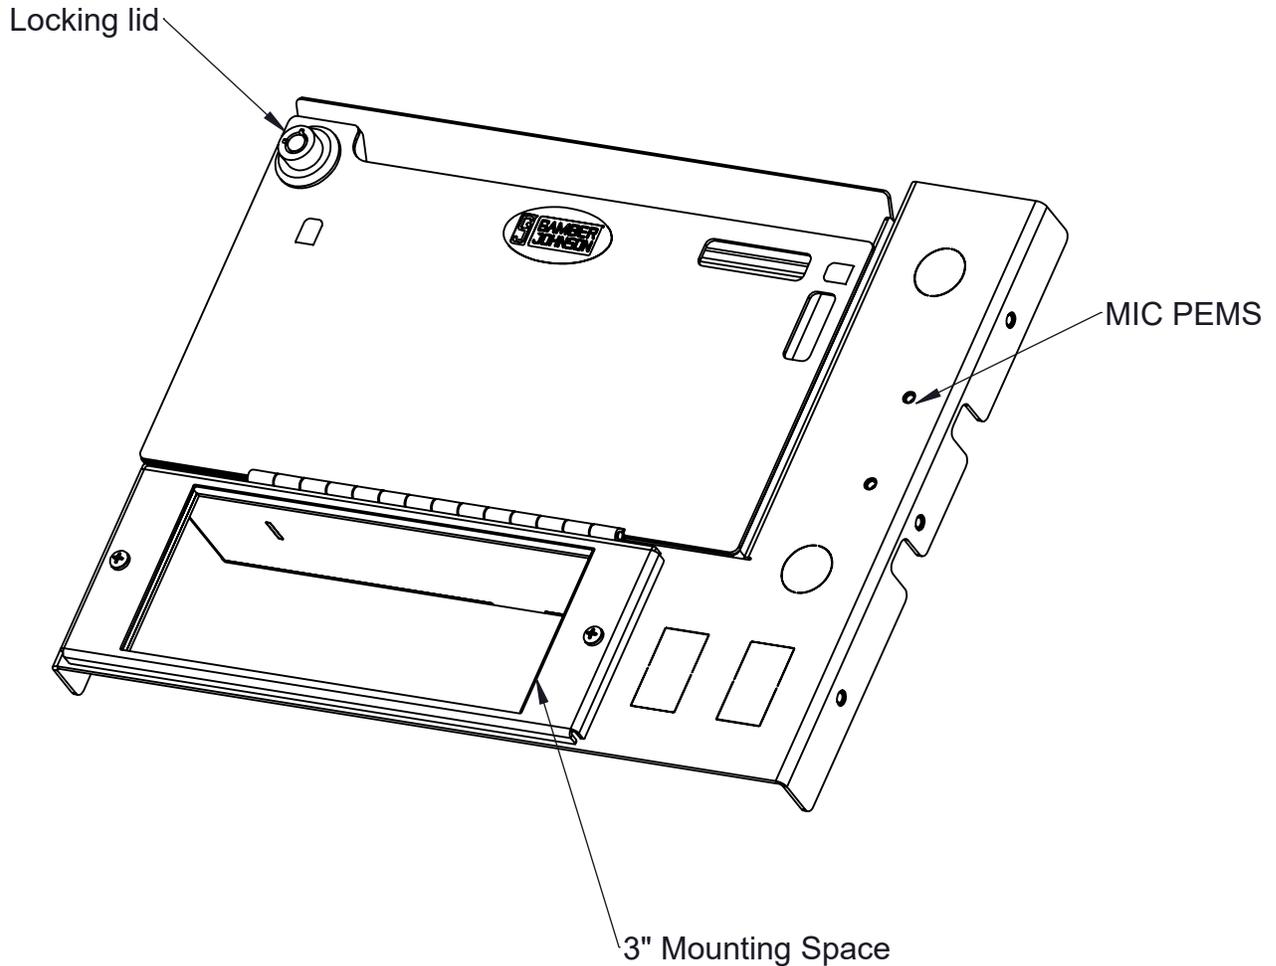
Note: Supplies with 90 degrees angle USB connection cable

Compatible with F150 Console 7160-1256/7160-1452 and other 14" wide GJ consoles

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

| ITEM	QTY	PartNo	DESCRIPTION
1	1	19560	PRINTER MOUNT - IN-CONSOLE FOR WIDEBODY
2	1	19562	PLATE - WIDEBODY PRINTER COVER
3	1	19565	PLATE - MOUNT COVER
4	1	19470	RETAINER - PRINTER
5	2	11219	CUSHION - 1.38 x 2.00 BLACK LOOP MATERIAL WITH PSA
6	2	10796-0001	#8-32 X .625 PPHMS -FS-014
7	3	1122-1006	#10-32 X .375 PPHMS -FS-014
8	1	1113-0804	#8-32 X .25 PPHMS -FS-014
9	1	11893	LOCK - DIRAK 264-9006
11	1	20544	CABLE - USB (M) TO MINI USB (M) DOWN (6FT LENGTH)
12	2	12136	PORON PAD - .34 x .90 x .12 THK
13	1	12143	DOWEL, DELRIN .4375 X 9.91
15	1	7120-0641	HARDWARE BAG - WIRE CHASE - TAHOE CONSOLE
16	2	9000-0043	DUAL LOCK - .50 WIDE, BLACK, HIGH DENSITY SIDE
17	2	9000-0046	DUAL LOCK - .50 WIDE, BLACK, LOW DENSITY SIDE
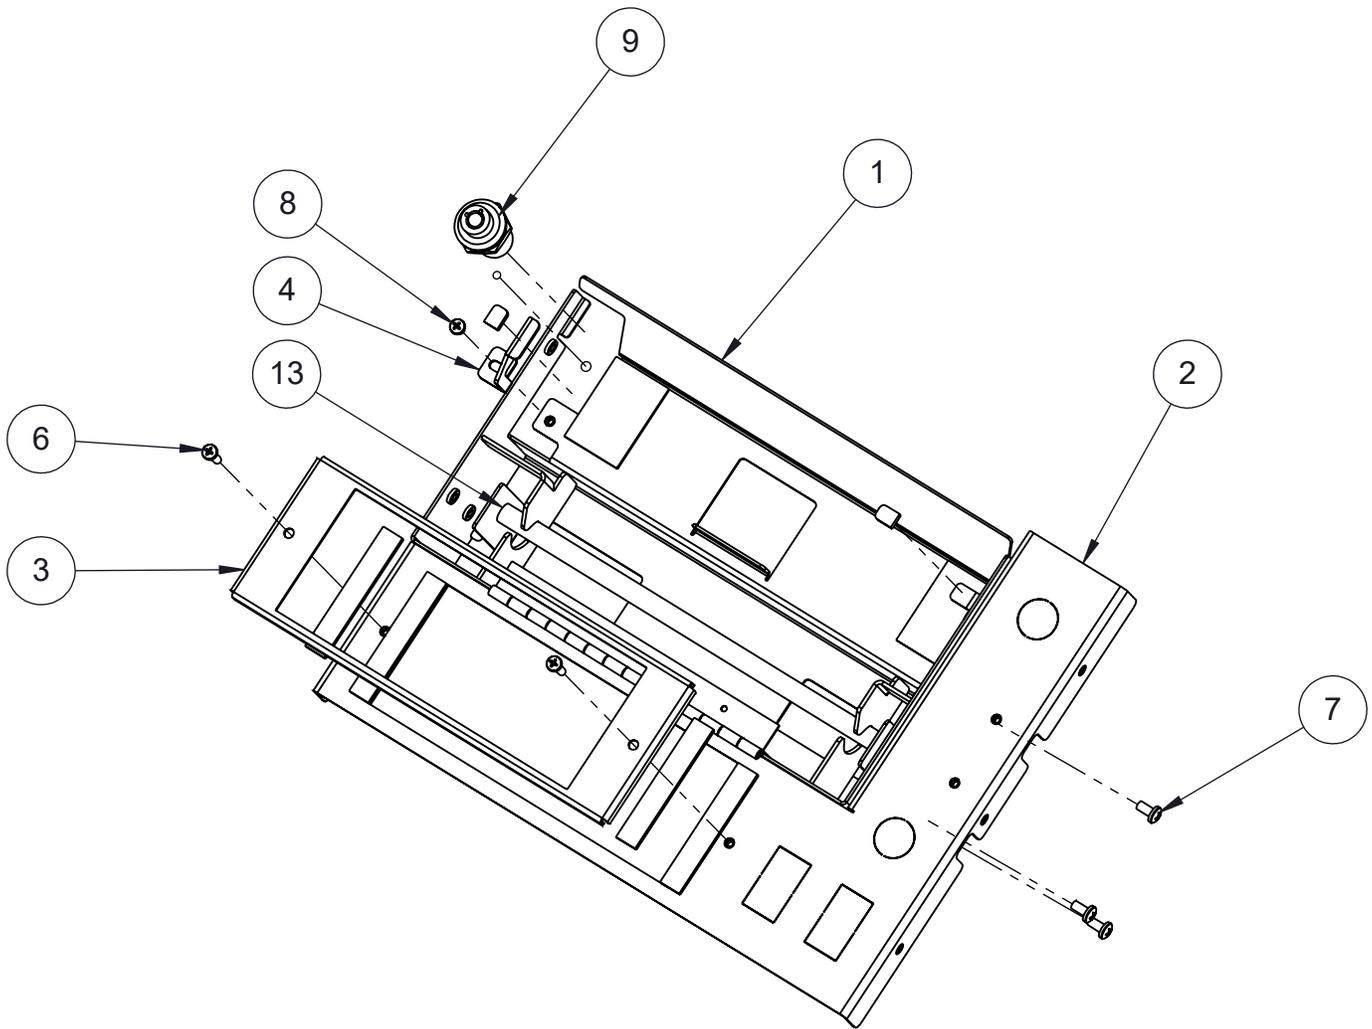
Install:

1. Remove equipments that is mounted in the angle section of the console (if applicable)
   *Go to step 4 if modification is not required.

2. For console 7160-1256/7160-1452 extra holes are required to mount the printer mount.
   - on the driver side of the console mark and drill holes as shown below

3.68

2x(0.20) holes

1.36
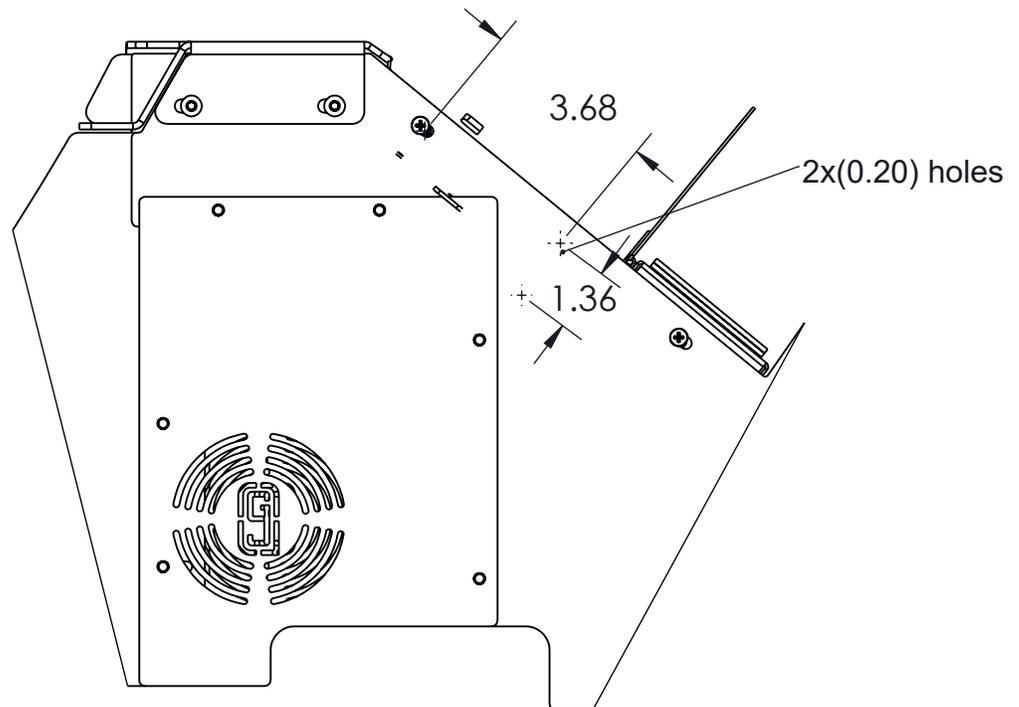
3. On The passenger side mark and drill as shown.

3.75

1x (0.20") hole
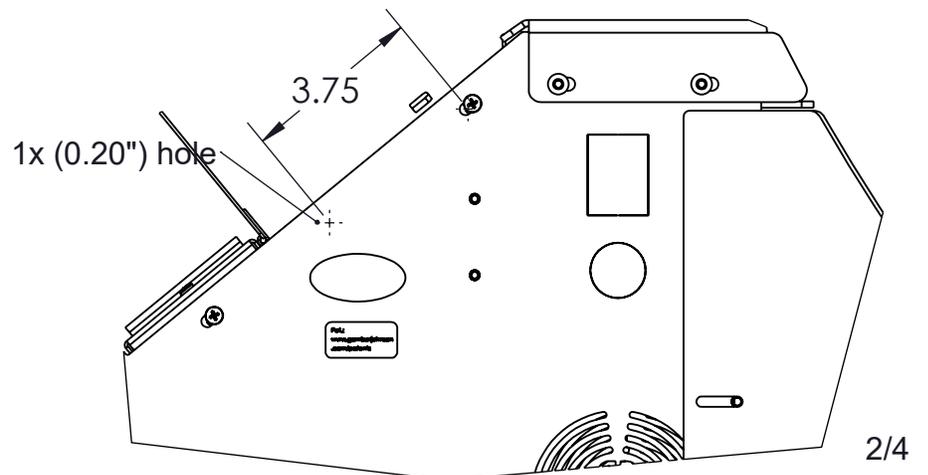
4. To install printer mount, align the 4 holes on the driver sdie and 3 holes on the passenger side mount with provide #10-32 hardware

5. To install the Printer in the mount, remove the 2 #8-32 screw on holding the printer retainer, slide the printer in place with paper exit side facing towards the front of the vehicle, than reinstall the printer retainer and complete wire connection to the printer then test function.

Printer Retainer

#8-32 screw

Paper Roll