

INSTALLATION INSTRUCTIONS

Product

7160-0329

BASE, DODGE, CHARGER, 2011+

Revision

B

Form


INST-522

Printing Spec: PS-001



- You must read and follow all of these installation instructions. Failure to follow the installation instructions may result in serious bodily injury or death.
- Do not install or use the 7160-0329 assembly in the area in which the airbag on the vehicle may be deployed. The installer and user of the 7160-0329 assembly are responsible for installing and using the 7160-0329 assembly outside the area in which an airbag may be deployed. (See Product Mounting Disclaimer Below)
- Keep these installation instructions with the product and readily available in the vehicle for future reference of other users of the product.
- Additional copies of the installation instructions can be obtained from Gamber-Johnson. If you need assistance or have any questions, call Gamber-Johnson at 1-800-456-6868.
- Do not remove warning label from product under any circumstances.

1. Remove the four seat bolts on the front passenger's seat (Figure 1).
2. Remove the passenger seat or lean it back onto the rear seats.
3. Lay the vehicle base on the frame cross member so that the square holes are approximately centered on the flooring cutouts (Figure 2).
4. Place the seat back into position on top of the vehicle base.
5. Verify the seat rails are lined up into the square holes in the vehicle base. The base should run parallel to the frame cross member.
6. Reinstall the four factory seat bolts.
7. Four 3/8-16 x .75" bolts, washers and lock washers are provided to mount a pole to the threaded inserts.

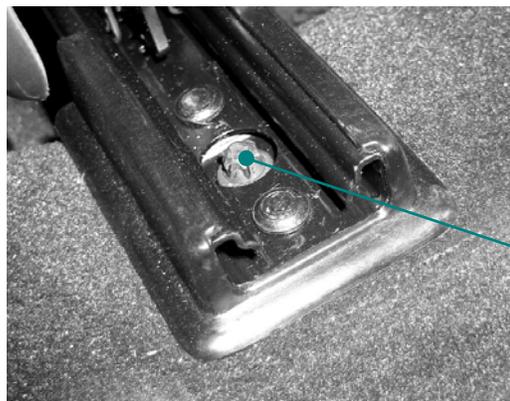

FACTORY SEAT BOLTS

FIGURE 1

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© copyright 2011 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

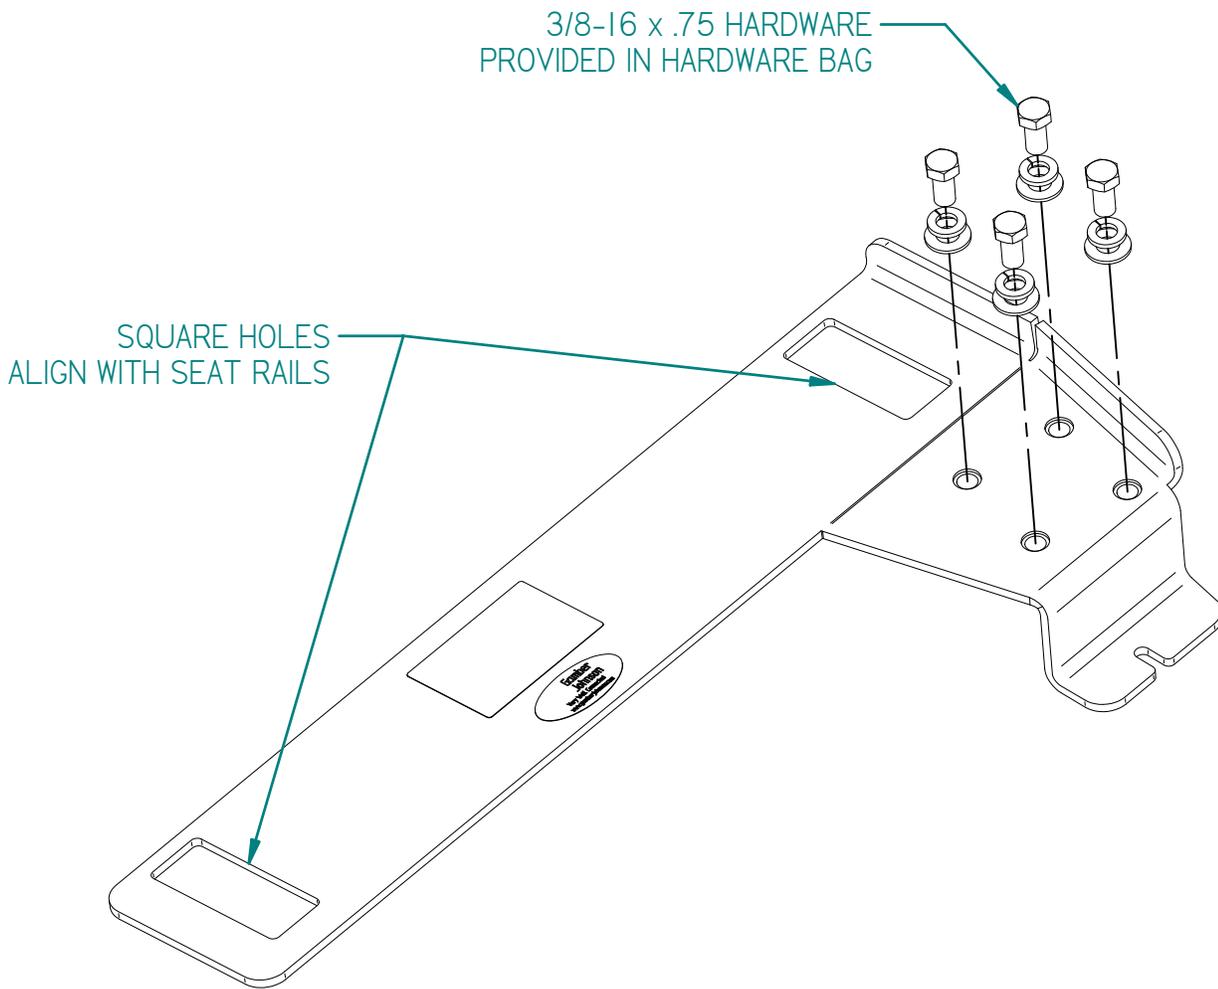


FIGURE 2

 **WARNING** 

- The 7160-0329 assembly should not be positioned in the area where the airbag may be deployed.
- DO NOT position the equipment in front of an airbag. Equipment positioned in front of an airbag may cause serious injury or death if an airbag is activated.
- If installation of the equipment requires that the equipment be placed in front of an airbag, the airbag should be deactivated. In order to secure permission for deactivating the airbag you must contact the National Highway Traffic Safety Administration at 1-800-424-9393 to gain permission to do so. If you have any questions or need assistance, call Gamber-Johnson at 1-800-456-6868.
- High speed vehicle turns may cause parts of the assembly to swivel, interfering with the driver or other equipment.