



# INSTALLATION INSTRUCTIONS

## Product

DS-56

HORIZONTAL SURFACE BASE

## Revision


Rev B

## Form

INST-14

Printing Spec: PS-001

1. First mount the head or rack on the base, following the instructions furnished with the head or rack.
2. With the head or rack in the center of tilt range, locate the assembly on the mounting surface in the desired position. Mark the locations of the four mounting holes.
3. Drill a 13/32" hole at each mounting hole location, using care not to damage any equipment below the mounting surface. Use machine bolts and nuts of the largest size that will fit the holes in the base. Most bases have holes for 3/8" bolts, but holes for 1/2" bolts are furnished in the taller bases.
4. Place bolts, washers and nuts in all holes and tighten. We strongly recommend **fender washers** if the mounting surface is less than 1/8" thick. Do **not** use lag screws or sheet metal screws as these can pull out of the floor.

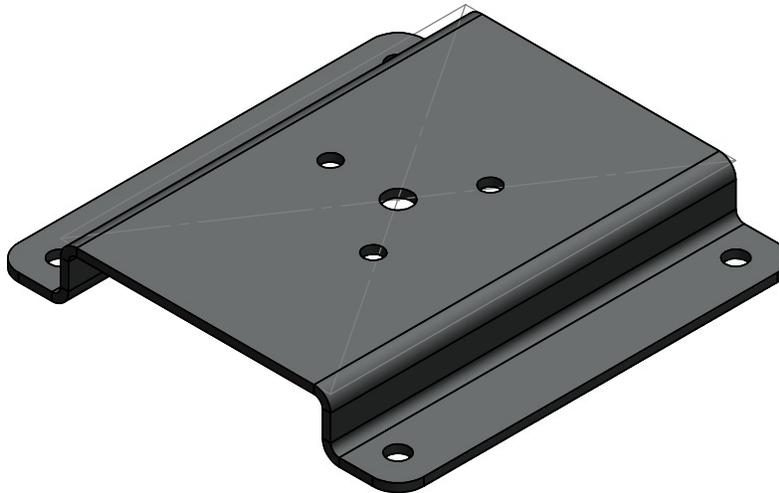

### Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2021 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868