

# INSTALLATION INSTRUCTIONS

<b><u>Product</u></b> 7160-1773-XX DELL 7230 TABLET CRADLE	<b><u>Revision</u></b> Rev B	<b><u>Form</u></b> INST-1114  <b>Printing Spec: PS-001</b>
--	---------------------------------	---

This instruction sheet is for the Dell 7230 Tablet Cradle only. For instructions on features, set-up, and operation of the Dell 7230 computer, please refer to the manual provided by Dell with the computer.

This cradle is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

- Item No. 7160-1773-00** Non-RF
- Item No. 7160-1773-04** Quad-RF

A USB-C Power Adapter is required to charge the tablet in this cradle, the below power adapter is sold separately unless ordered through a KIT.

**7300-0621** - 11-16VDC Input - 100W USB-C Output - Available with the Cradle as a KIT: **7170-0992-XX**




**Product Mounting Disclaimer**  
Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.


© Copyright 2022 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868


# DELL 7230 TABLET CRADLE FEATURE IDENTIFICATION

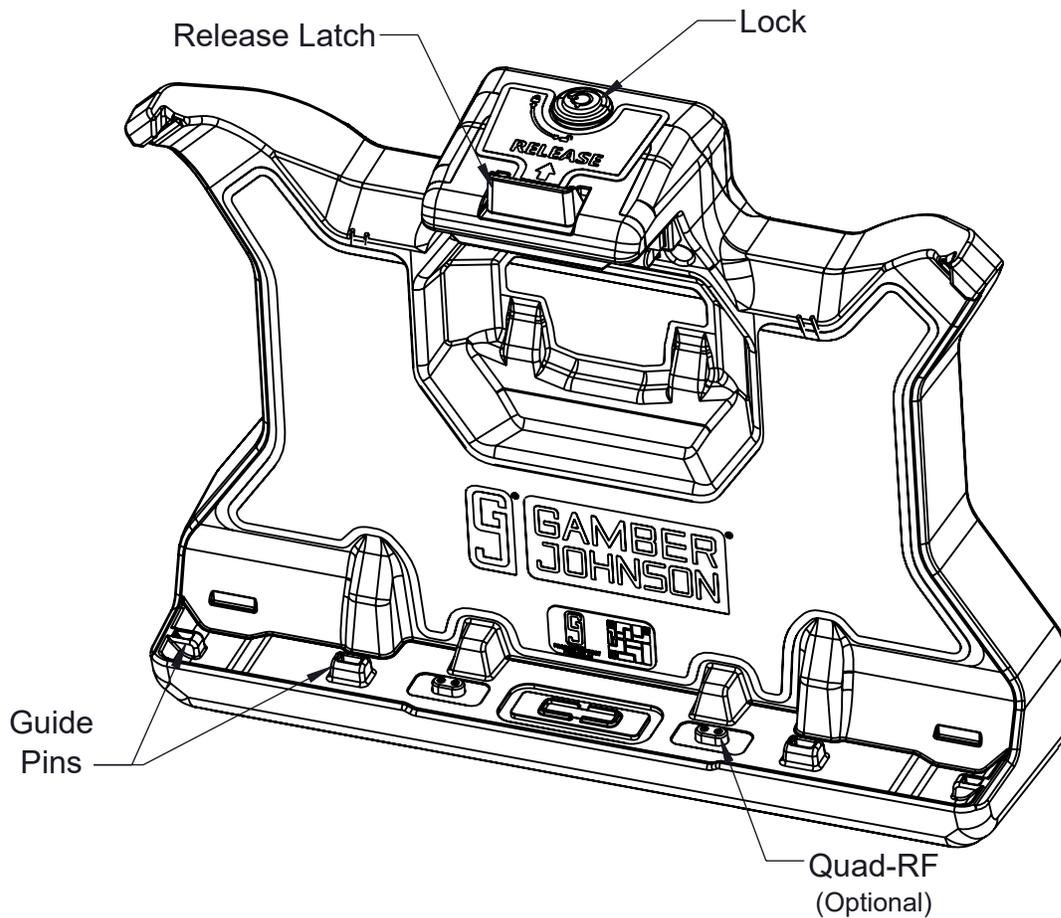

Mounting Studs  
 1/4-20 x 0.625"  
 Mounting HW Provided  
**Recommended Torque = 15in/lbs**

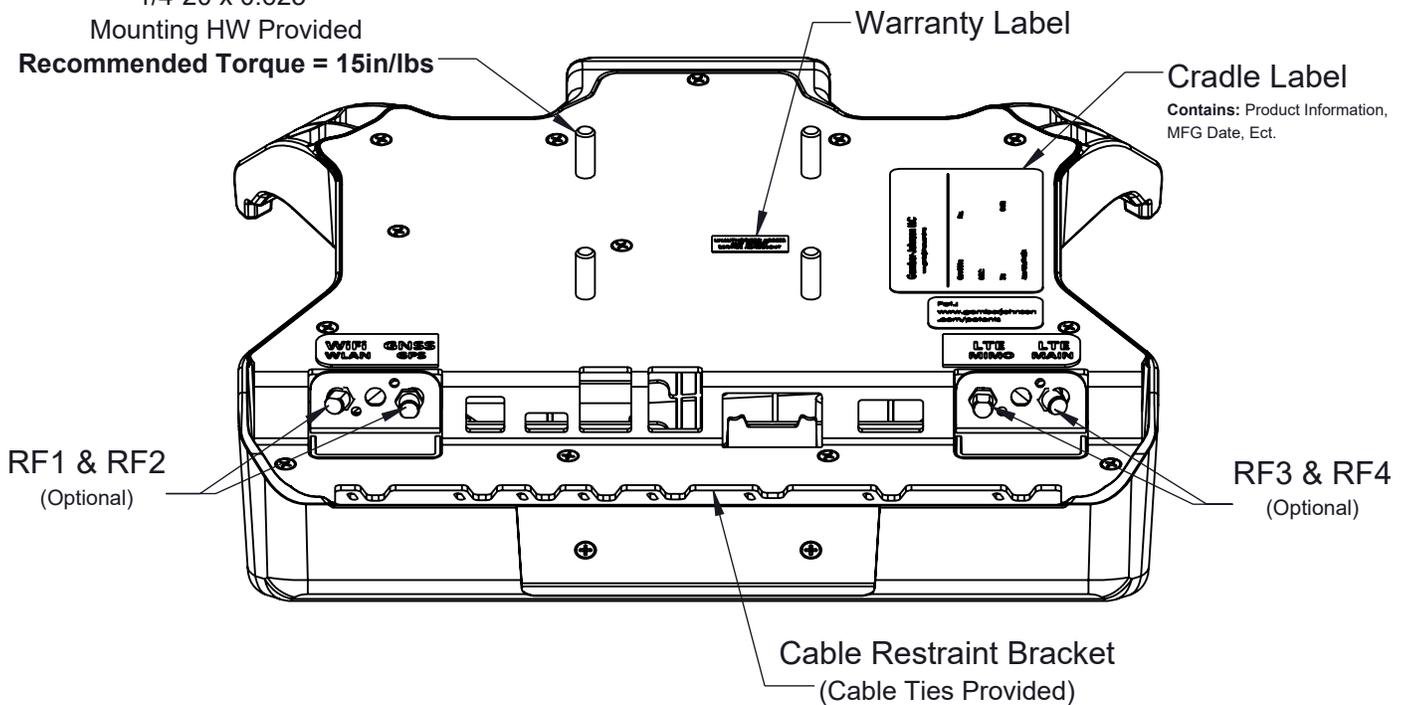


# CABLE ROUTING

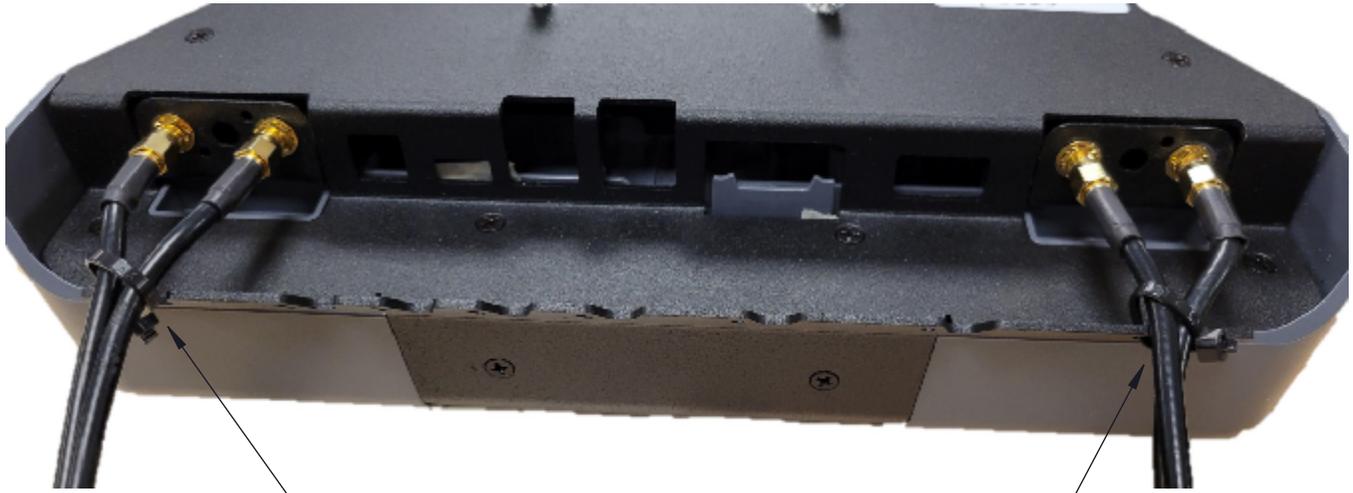

Use supplied cable ties to secure RF cables to cradle

# RF IDENTIFICATION

Note: RFs are NOT configurable

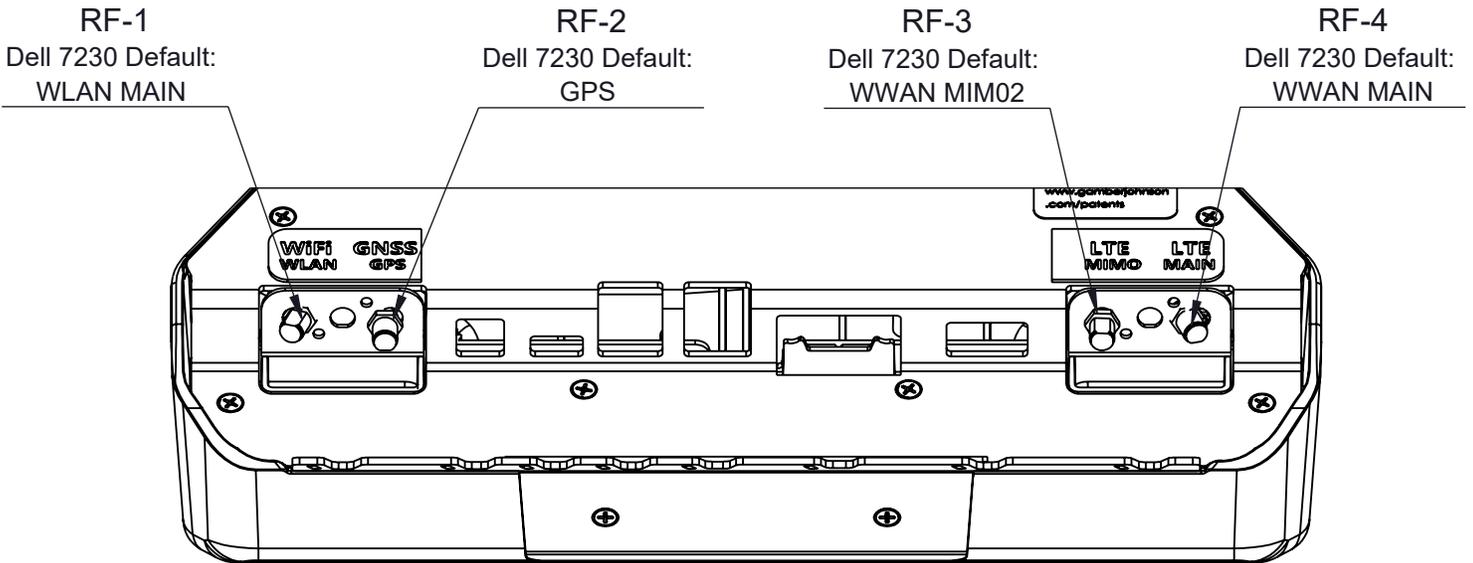

# DOCKING AND UNDOCKING THE TABLET

1. Insert the bottom of the tablet into the cradle.
2. Rotate the top of the tablet under the top latch until the tablet is resting inside the main housing. The latch will spring down in front of the tablet to hold it in place.  
(See figures 1 & 2)
3. (Optional) Turn lock 90 degrees clockwise to lock tablet in cradle.



Figure 1



Figure 2



Locked Position

Unlocked Position



Figure 3

## TO UNDOCK THE COMPUTER

1. Unlock the cradle if locked (turn lock 90 degrees counter-clockwise)
2. Push upward on the thumb knob and pull outward on the top of the tablet until it clears the top latch. Make sure handle clears the lock housing.  
(See Figures 3 & 4)
3. Lift the tablet up and out of the cradle.



Figure 4