



# INSTALLATION INSTRUCTIONS

**Product**  
**7160-1177**

**Revision**  
Rev.A

**Form**  
INST-852

**Volvo switch pocket dash mount**

**Printing Spec:PS-001**

This instruction sheet is for mounting the Volvo switch pocket dash mount (7160-1177). The mount is located in the bottom right dual switch location on the switch panel. Any switches currently mounted in that location will need to be relocated.

## **Installing the mount:**

1. Remove the screw cover molding from the dash panel.
2. Remove the switch panel by removing the (2) screws at the bottom of the panel.
3. Remove the 2 switches or switch covers located in the bottom right dual switch location.
4. Align the Volvo clamp bracket and Volvo back plate to the bottom right dual switch location on the switch panel. Attach with a Zirkona semi truck mount or a 7160-1237 adjustable angle mount. See page 2.

switch panel

bottom right  
dual switch  
location

screw cover  
molding




switch panel  
screws



Volvo clamp  
bracket



Volvo back  
plate

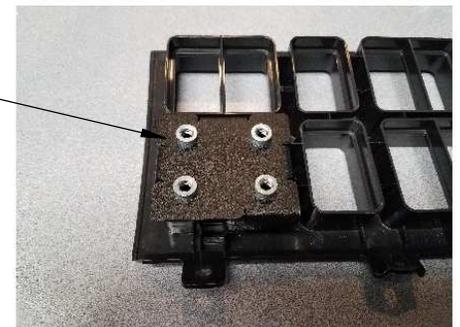

### **Product Mounting Disclaimer**

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2018 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

**Installing the mount:**

4. Attach a Zirkona semi truck mount or the 7160-1237 to the switch panel with the #10-32 x 2" long screws and washers provided in hardware bag 7120-0862.

5. Attach the docking station or cradle to the Zirkona semi truck mount using the hardware supplied with the dock or cradle.

6. Reinstall any switches or switch hole covers into the switch panel that were previously removed during the installation. (Consider leaving out a third switch hole cover for routing wires from the docking station or cradle into the dash to conceal the wires.)

9. Reattach the switch panel to the vehicle dash using the screws previously removed in step 2.

10. Reattach the screw cover molding removed in step 1.

Zirkona Semi Truck Mount (various options are available)

#10-32 x 2" long screws and washers




View with Zirkona Semi Truck Mount and cradle attached to dash



7160-1237

#10-32 x 2" long screws and washers

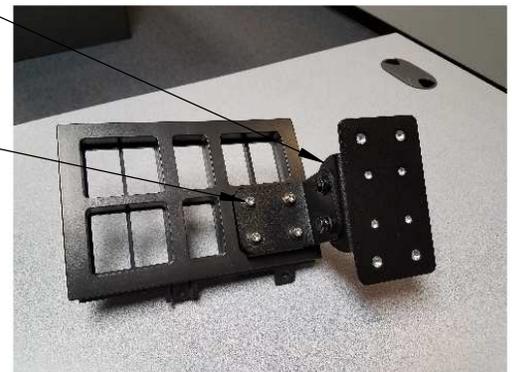

View with cradle, Zirkona Semi Truck Mount, and 7160-1237 attached to dash

