

INSTALLATION INSTRUCTIONS

ProductRevisionForm7160-1676-XXRev BINST-1087

GETAC ZX-10 TABLET CRADLE

Printing Spec: PS-001

This instruction sheet is for the Getac ZX-10 cradle only. For instructions on features, setup, and operation of the Getac ZX-10 computer, please refer to the manual provided by Getac with the computer.

This cradle is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

Item No. 7160-1676-00 Non-RF **Item No. 7160-1676-03** Tri-RF

Gamber Johnson offers a variety of KITs which include the Power Adapter to charge the device while in the cradle. See below KITs available for purchase. NOTE: Generation 1 ZX-10 devices charge via Barrel Plug adapter and Generation 2 (or newer) device charge via USB-C adapter.

Barrel Plug Power Adapter Kits (Generation 1 Devices): Power Adapter Only = 7300-0471

7170-0964-00 = Non-RF Cradle + Barrel Plug Auto Power Adapter **7170-0964-03** = Tri-RF Cradle + Barrel Plug Auto Power Adapter

USB-C Power Adapter Kits (Generation 2 or Newer Devices): Power Adapter Only = 7300-0593

7170-1145-00 = Non-RF Cradle + USB-C Auto Power Adapter

7170-1145-03 = Tri-RF Cradle + USB-C Auto Power Adapter





Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2022 Gamber-Johnson, LLC

ZX-10 CRADLE FEATURE IDENTIFICATON

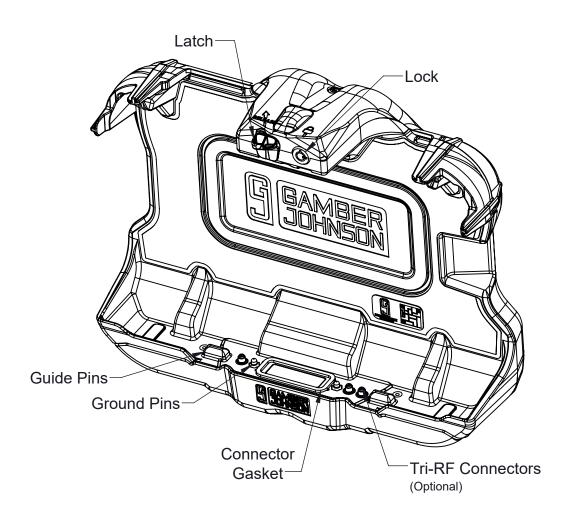

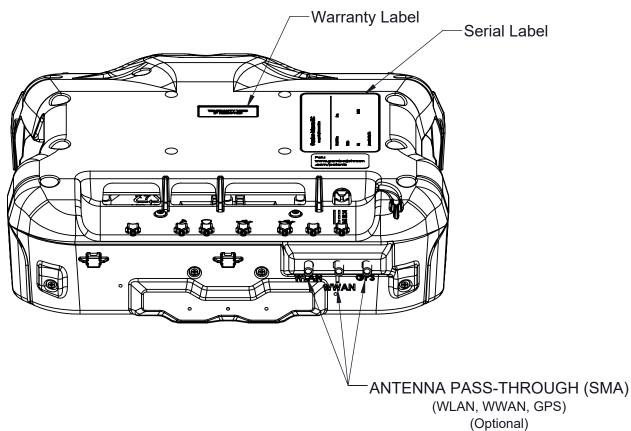

DOCKING AND UNDOCKING THE TABLET

- 1. Insert the bottom of the tablet into the cradle.
- 2. Rotate the top of the tablet under the top latch until the tablet is resting inside the maing housing. The latch will spring down in front of the tablet to hold it in place. (See figures 1, 2, & 3)

(Optional) The key lock can now 3. be used for security purposes.



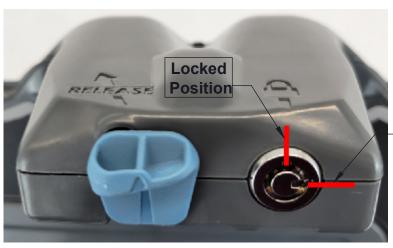








Figure 1



Unlocked **Position**

TO UNDOCK THE COMPUTER

- 1. Unlock the dock if locked.
- 2. Push upward on the thumb knob and pull outward on the top of the tablet until it clears the top latch lift the tablet out of the dock. Make sure handle clears the lock housing. (See Figure 4)
- 3. Lift the Tablet up and out of the cradle.





Figure 4