



INSTALLATION INSTRUCTIONS

Product

7160-1732

HD .75 TO 2" DIA. ROUND POLE MOUNT

Revision

Rev A

Form

INST-1104


Printing Spec: PS-001

This instruction sheet is for the Gamber-Johnson HD .75 to 2" dia. pole mount. The mount can be installed for use on a vertical or a horizontal pole. The mount is shipped in the vertical orientation.

If the mount is being used on a horizontal pole, you will need to relocate the arm from the top of the base to the side and rotate the mount 90 deg. for mounting. You can do this by removing the 3/8 x 1.50" hex bolt and washers and relocating them to the side of the mount with the open hole (see page 2 for exploded view).

Attaching the mount to a pole:

1. Attach the mount to the round pole by placing the pole in the "V" notch of the base and position the back plate behind the pole. Note that the back plate flanges should be perpendicular to the round pole orientation when attaching the mount.
2. Attach the back plate with the appropriate length Hex bolts (1.50" or 2.75"), flat washers, and lock washers found in hardware bag 7120-1068. Be careful not to crush the round pole by tightening the mounting bolts to tight.
3. The mount is shipped with 2 stabilizers that can be attached to the back plate. If applicable, attach the stabilizers to the back plate with the 3/8" x 3/4" long hex bolts, flat washers, and lock washers found in hardware bag 7120-1068. Position the stabilizers tight against the door or wall to help eliminate rotation around the pole from shocks and vibration.
4. A Gamber-Johnson docking station or cradle can be attached to the clevis portion of the mount. Use the hardware supplied with the cradle to attach to the clevis.

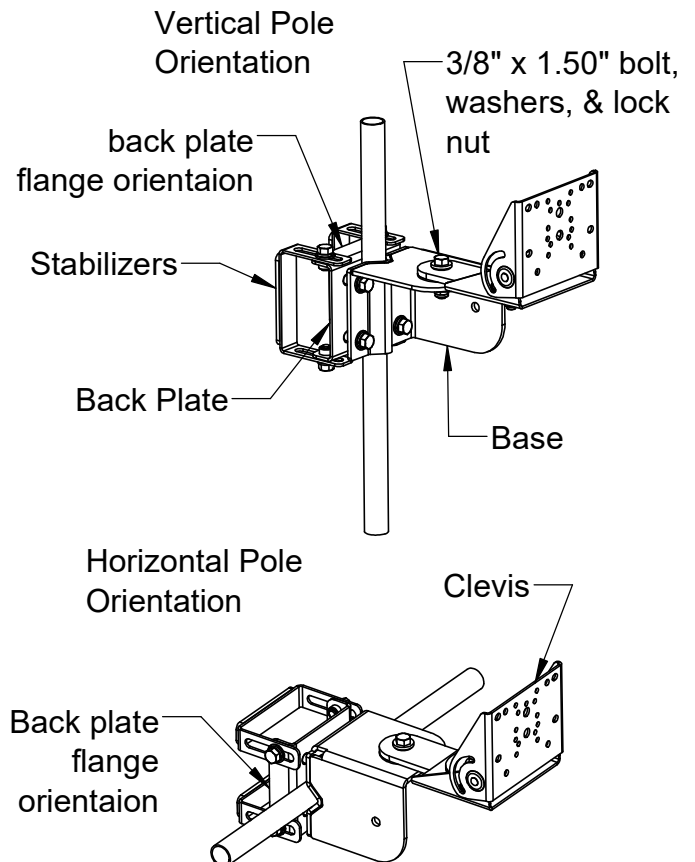


Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2022 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

**view showing the washer
stack for switching the mount
to the horizontal pole orientation**

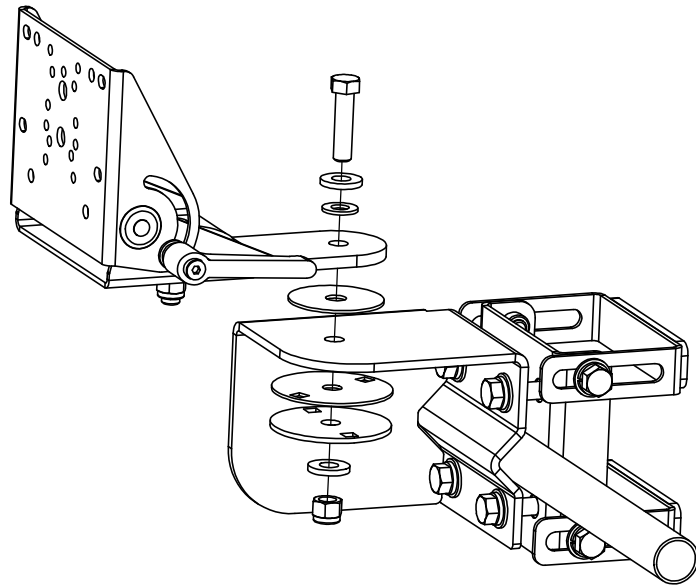

Install photos



vertical pole orientation shown
without stabilizers



horizontal pole orientation
shown with stabilizers