



INSTALLATION INSTRUCTIONS

Product

Universal Console Boxes Mounted
On Top Plates

Revision

Rev C

Form

INST-752

Printing Spec: PS-001

Universal console boxes can be installed either on a short or long top plate. (Short: 7160-0086, Long: 7160-0085). The top plate may be mounted to the vehicle using the vehicle specific or universal leg kits. Refer to the leg kit installation instructions for installation of these parts.

To attach the console box to the top plate:

1. Mount the top plate in the vehicle in its approximate final position.
2. Insert (4) 1/4-20 x 1.00 carriage bolts provided in the hardware bag from the bottom side through the top plate and slots in the bottom of the console box.
3. Fasten the box to the plate using the flat washers, lock washers and 1/4-20 hex nuts remaining in the hardware bag. See FIG 1 below for detail.

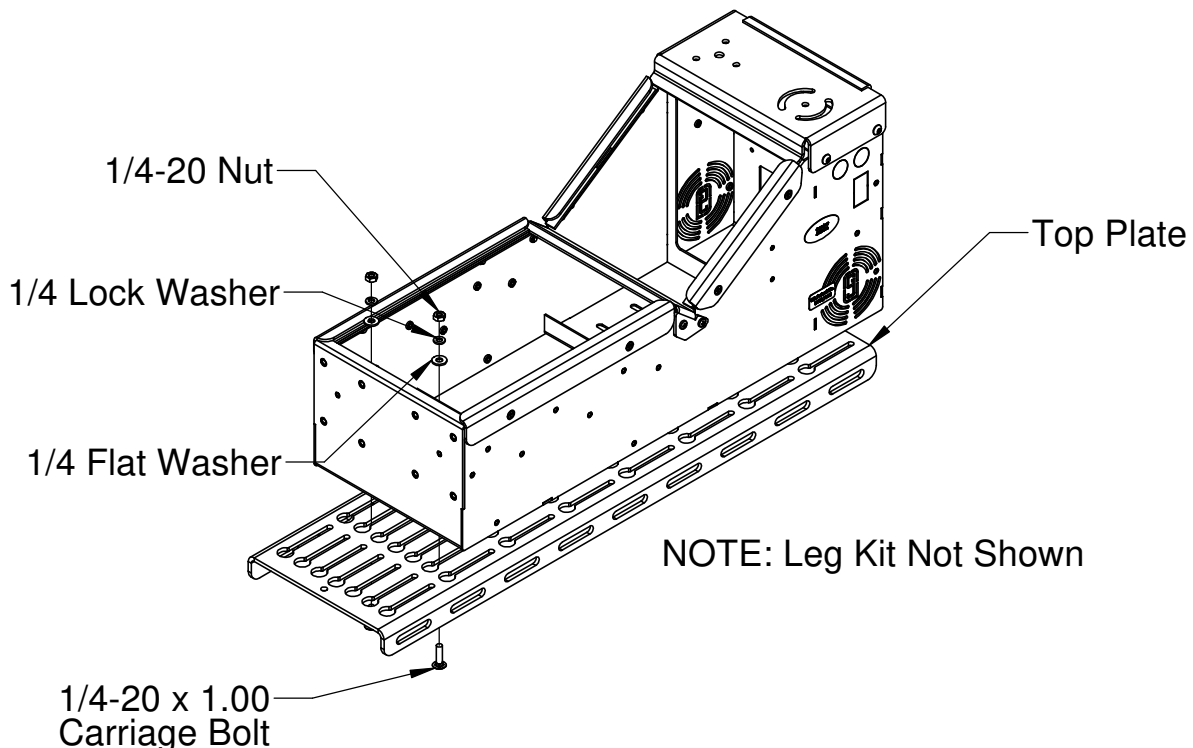


FIG 1 - Console Installation on Top Plate

Product Mounting Disclaimer


Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufacturers specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© copyright 2016 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868



INSTALLATION INSTRUCTIONS

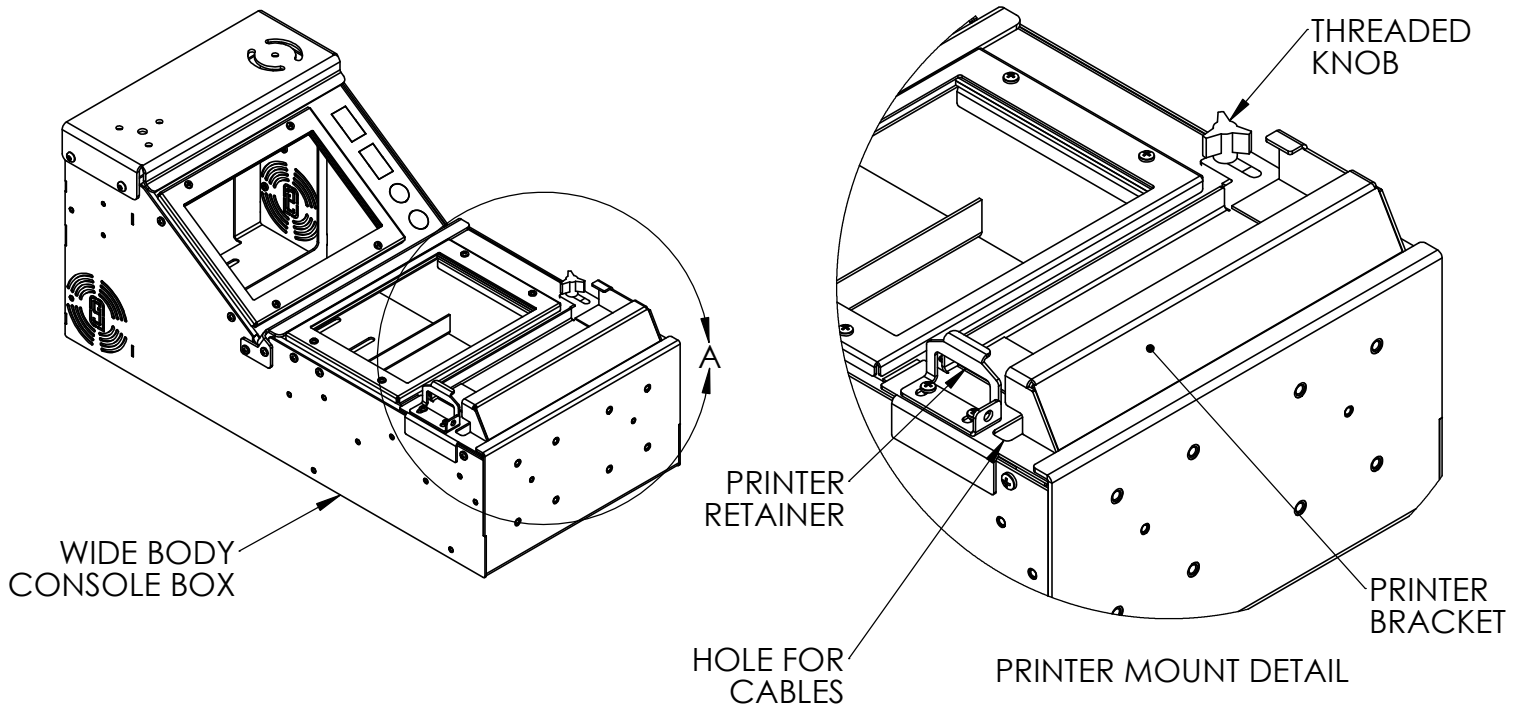Product**7160-0956, 7160-0958****Revision****Rev.A****Form****INST-807****WIDE BODY CONSOLE PRINTER MOUNT****Printing Spec:PS-001**

The wide body console printer mount is designed to mount a Brother Pocket Jet series printer and paper within the console box. The printer is mounted near the back of the console box and is removeable to access the paper roll for refilling. These installation instructions will cover the general functions of the printer mount as well as how to install the printer mount upgrade into an existing wide body console box.

Printer Mount Features

- Retaining bracket with hole for cable strain relief. Mounted near hole to route wires inside the console box.
- Paper storage box, fits one full roll of paper roughly 3" in diameter.
- Printer mount covers paper storage box, protecting printer from exposure to light.
- Easy, no tool paper replacement, only requires removing one threaded knob.
- Minimal space in box, still retains 6" of mounting space for devices in the horizontal section of the console box.

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2017 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

To Replace The Paper Roll:

1. Loosen the threaded knob holding the printer unit in place.
2. Slide the printer bracket forward while lifting the front. Once the bracket clears the rear flange of the box set it aside.
3. Remove the old roll and rod. Place the new paper roll on the rod and holding the beginning of the roll drop it into the paper roll pocket. The paper should dispense off the side of the roll near the back of the box.
4. Feed the paper up through the gap in the cover of the printer bracket and into the printer itself.

To Install the Printer Mount Into an Existing Wide Body Console:

1. Remove the main hold down, main radio mounting bracket and spreader bar by removing the (12) screws on the side of the box.
2. Attach the paper pocket to the new main body bracket using the (4) #6-32 countersunk machine screws included in the hardware bag.
3. Install the new main body bracket into the box using (6) #10-32 machine screws included in the hardware bag.
4. Install the spreader bar onto the console using (4) #10-32 machine screws from the hardware bag.
5. Mount the printer into the printer bracket using the printer retainer to hold it in place. The retainer also has holes for cable strain relief.
6. Load the paper as described in the previous section.
7. Place the printer bracket underneath the rear flange on the box and hold it in place using the #10-32 threaded knob.

