



INSTALLATION INSTRUCTIONS

Product

7160-1669

FIXED FORKLIFT CUP HOLDER MOUNT

Revision

Rev A

Form

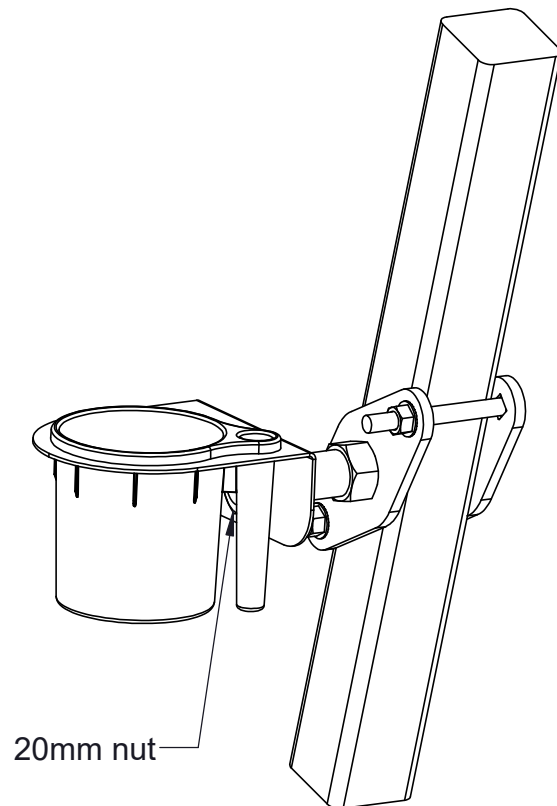
INST-1054

Printing Spec: PS-001

This instruction sheet is for the fixed forklift cupholder mount. It is designed to mount to an overhead guard leg.

Attaching the mount:

1. Attach the diamond plate mount to the tube with the 3/8" hardware supplied in hardware bag 7120-0864. Use the 3/8" carriage bolts that best fits your application. Make sure the bolts are positioned as close to the tube as possible. You will need to rotate the diamond plate mount to accomplish this.
2. Rotate the cup holder "L" bracket so it sits level and tighten the 20mm nut on the inside of the bracket.

**Product Mounting Disclaimer**

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2021 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868