INSTALLATION INSTRUCTIONS

Product	Revision	Form
7160-1693	Rev A	INST-1220
ZD421 / ZD621 printer mount	**Printing Spec:** PS-001	

Attaching the printer mount:

1. Remove the (4) 1/4-20 hex nuts, lock washers, and flat washers from the bottom side of the mount. (7160-1723 uses #10-32 hardware in AMPs hole pattern)

2. Place the printer mount on the motion attachment (sold separately) with the 1/4-20 studs (75mm hole pattern) protruding through the motion attachment and reinstall the 1/4-20 hardware. Leave loose so the mount can be adjusted to fit the printer.

3. Loosen the #10-32 lock nuts on the rear bracket so the bracket is adjustable.

4. Insert the printer into the mount and slide the back bracket into the opening on the back of the printer to hold it in place.

5. Pushing the braket downward, tighten the #10-32 lock nuts on the rear hold-down bracket to hold the printer tight.

6. Slide the mount together front to back to tightly hold the printer in place, tighten the 1/4 hex nuts that hold the printer mount to the motion attachment.

7. lift on the front of the printer and remove it from the cradle.

8. Snap the 2 pieces of dual lock together and determine the best location towards the front 0f the cradle to attach the dual lock. Remove one of the release liners from the dual lock and attach it to the sheet metal base.

9. Remove the second release liner from the remaining piece of dual lock. Then insert the back of the printer into the cradle catching the rear hook. Lower the front of the printer down onto the exposed dual lock to attach it to the bottom side of the printer.

7. Attach the power and peripheral cables to the printer and hold in place with the cables ties supplied.

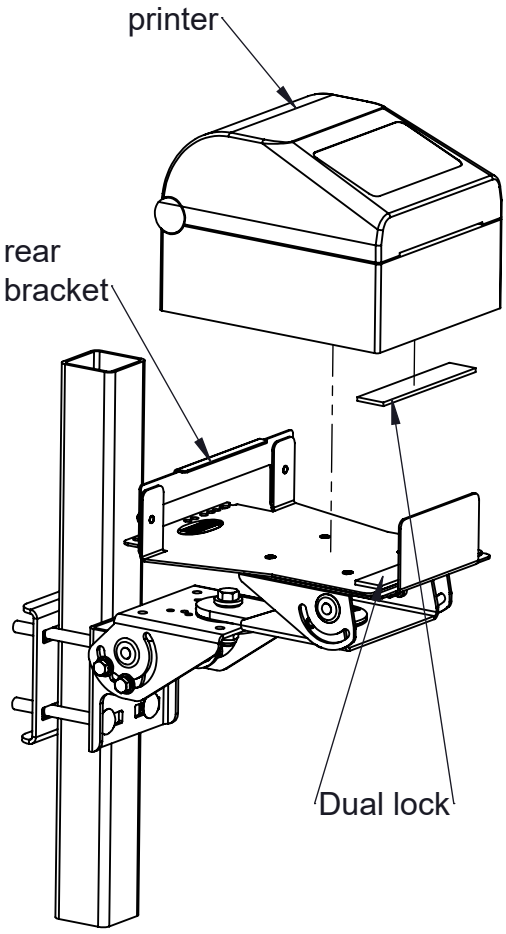

Product Mounting Disclaimer
Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2024 Gamber-Johnson, LLC