INSTALLATION INSTRUCTIONS

Product

Revision

Form

Standard and Tall Tablet Display Mounts 7160-0761 and 7160-0831

Rev.E


INST-720

Printing Spec:PS-001


The Tablet Display Mounts have several overlapping VESA 75mm patterns which allows for mounting several different tablet docking stations and cradles.


If needed, the handle can be repositioned on the opposite side.

If the mount will be permanently used in a vertical position (not tilted forward), a .25-20 bolt can be installed and fightened on the side opposite the handle, to lock the display in position.



VESA 75mm **POSITIONS**



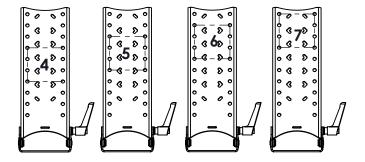



Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

Attaching the mount

Use the supplied hardware to attach the mount as shown.

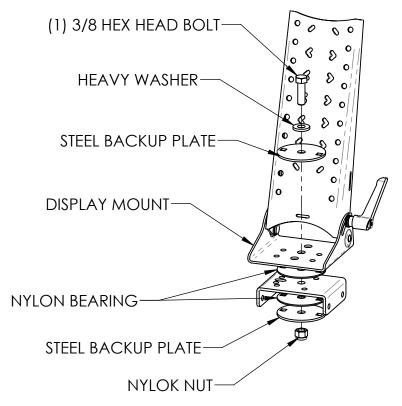


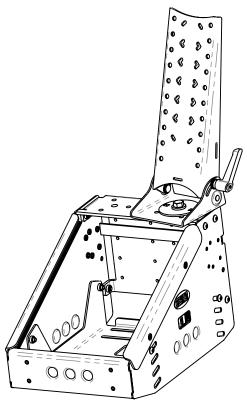

The Tablet Display Mounts can be mounted on any Gamber-Johnson pole or console with a 3/8" mounting hole.

Assemble the components as shown.

Tighten the bolt and Nylok nuts to get the desired amount of friction when rotating the Display Mount.

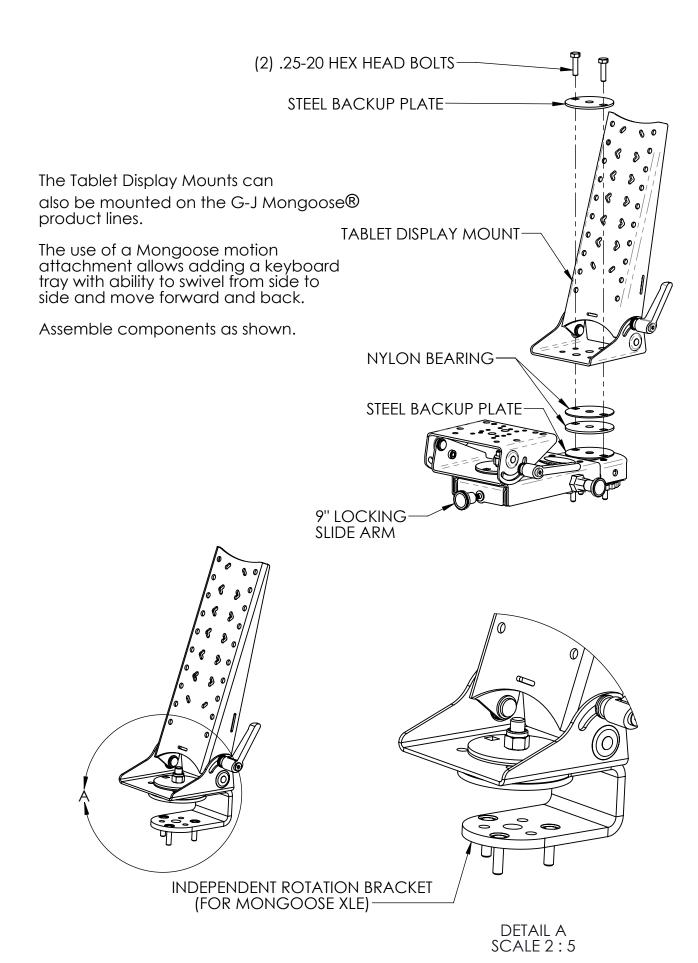

3/3