



# INSTALLATION INSTRUCTIONS

## Product

7160-1243, 7160-1243-01, & 7160-1243-02

## **INTERNATIONAL LT DASH MOUNT**

## Revision

Rev.B

## Form

INST-855

Printing Spec:PS-001

This instruction sheet is for the Gamber-Johnson International LT dash mount. For other products sold by Gamber-Johnson please reference their specific instruction sheets.

The International LT dash mount is designed to replace the existing dash pocket that is located just to the right of the steering wheel.

### Attaching the mount:

1. Pull outward on the top edge of the steering wheel dash panel ( it is held in place with spring clips) to gain access to the pocket dash panel mounting screw.




2. Remove the pocket dash panel mounting screw.

3. Remove the pocket dash panel by pulling outward on the panel. It is held in place with spring clips. Lay the pocket dash panel on top of the dash.



4. Remove the 4 pocket mounting screws that hold the pocket in place.

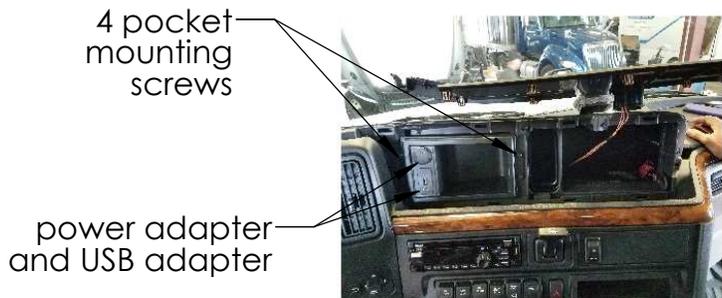

5. If the pocket has a power adapter or USB adapter, unplug the wires and remove them from the pocket. The power adapter has 2 pieces, depress the tabs inside the power adapter to separate the interior metal plug from the plastic trim ring cover.

#### Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2018 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

## **Attaching the mount continued:**

6. If you removed the power port adapter and USB adapter from the pocket, then pop out the corresponding knockouts on the new LT dash plate. If there was no adapters then do not remove the knockouts and skip to step 9.

7. Install the power port trim ring into the knockout (note the rectangular notch where the cover attaches). Then install the metal interior portion of the power port adapter. Install the USB adapter into the rectangular knockout.



8. Reattach the power port and USB wires removed in step 5.

9. The LT dash plate has 4 cutouts on the bottom side. This is for routing cables (power cable or other types of peripheral cables). The device power supply can be mounted inside the dash with just the cable end sticking out.

10. Attach the LT dash plate to the dash with the mounting screws removed in step 4. Make sure the power cable and/or peripheral cables are hanging out of the dash (through the cutouts) after the plate is attached.

11. Reattach the pocket dash panel with mounting screw and the steering wheel dash panel removed in steps 1 and 3.

12. Attach the cradle mounting bracket to the computer cradle with the hardware supplied with the cradle.

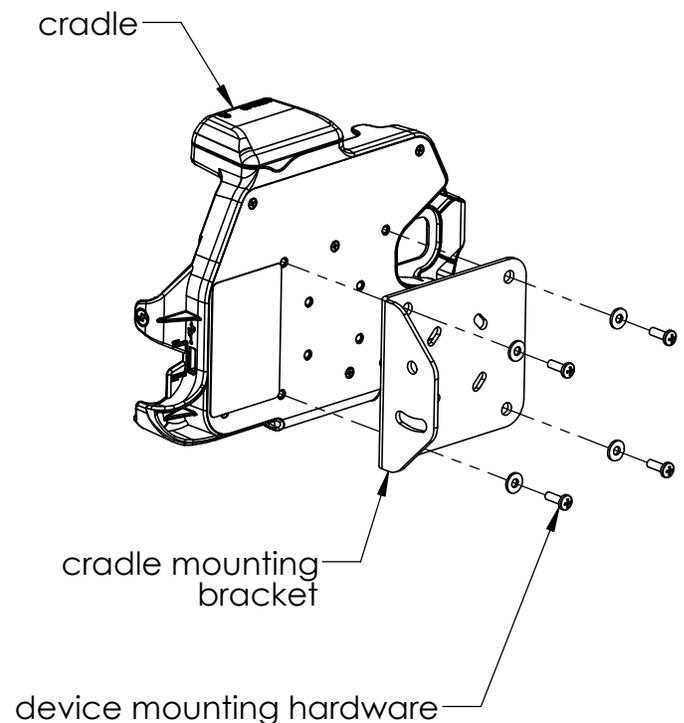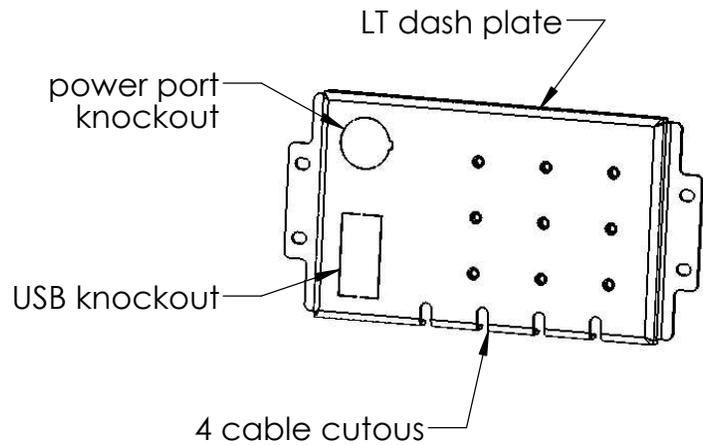

**Attaching the mount continued:**

**Note: if you are installing 7160-1243-01 or 7160-1243-02, skip to steps 16 & 17.**



13. Attach the "L" bracket to the LT dash plate with the #10-32 mounting hardware found in hardware bag 7120-0873. Pick the set of holes that will best position the device being mounted.

14. Attach the power cable or any peripheral cables to the docking station.

15. Attach the cradle bracket to the LT dash bracket with the 1/4-20 hardware supplied in hardware bag 7120-0873. Position the dock to the desired angle and tighten in place.

16. If you purchased 7160-1243-01, attach the 7160-995-00 cell phone holder to the LT dash plate with the #10-32 mounting hardware supplied in hardware bag 7160-0873. Pick the set of holes that will best position the device being mounted.

17. If you purchased 7160-1243-02, you will need to add a Zirkona for Big Rigs mount (see Logistics Accessories on the Gamber-Johnson website) or some other type of mount with the AMP's hole pattern to complete your solution.

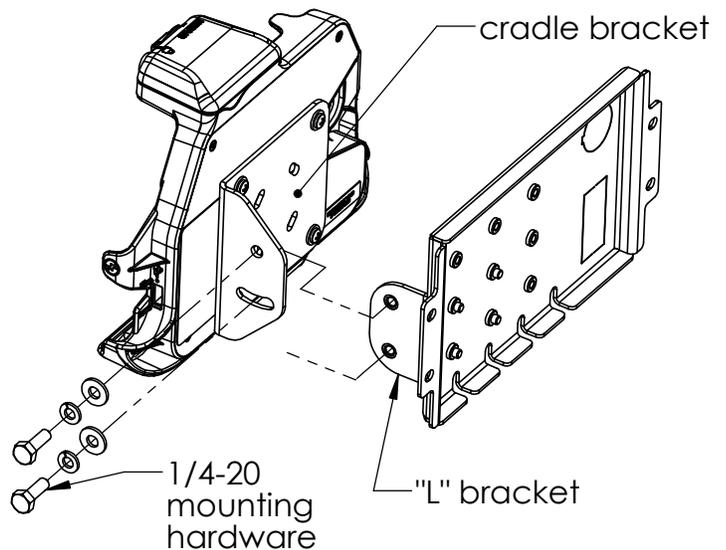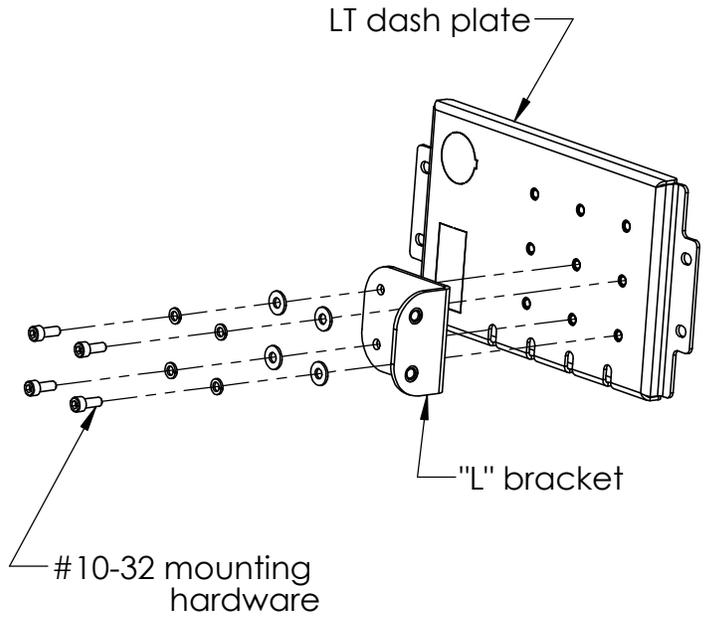

7160-1243-01



7160-1243

