

DELL 12" RUGGED TABLET DOCKING STATION

Engineered for the demanding work environments in material handling, manufacturing, and transportation.

Designed for the Dell Latitude 7230 and Pro Rugged 12 RA02260 tablets, Gamber-Johnson's docking station helps professionals working in public safety, material handling and the utilities complete their daily work challenges. Powered dual USB-A ports and USB-C port provide connections for scanners, printers, or other peripherals needed to support a mobile office environment and the fast dock/release saves time when taking the tablet out for your work. This docking station accommodates OEM accessries like the tablet's hand strap or magnetic mount attachment allowing for uninterrupted productivity on the job. The keyed-lock provides added security and theft deterrence.

| DEVICE | WEIGHT | HEIGHT | WIDTH | DEPTH | | |
|---------------------------|-------------------|---------------------|---------------------|-------------------|--|--|
| Docking Station | 2.8 lbs / 1.27 kg | 10.05 in / 25.53 cm | 12.14 in / 30.84 cm | 3.18 in / 8.08 cm | | |
| Cradle | 2.6 lbs / 1.18 kg | 10.05 in / 25.53 cm | 12.14 in / 30.84 cm | 3.18 in / 8.08 cm | | |
| Tablet Keyboard Cradle | 3.1 lbs / 1.41 kg | 10.05 in / 25.53 cm | 12.14 in / 30.84 cm | 3.6 in / 9.14 cm | | |

ACCESSORIES

- LIND 120W Auto Power Adapter -Barrel Input with Bare Wire Leads (Item No. 7300-0714)
- LIND Auto Power Adapter USB-C Input with Cigarette Plug (Item No. 7300-0621)
- Lind 12-32V Isolated material handling power adapter (Item No. 7300-0305)
- Lind 20-60V Isolated material handling power adapter (Item No. 7300-0306)
- Lind 72-110V Isolated material handling power adapter (Item No. 7300-0622)

CERTIFICATES & TESTING

- MIL-STD-810H Operational and Non-Operational Vibration/Shock Testing
- Environmental: Humidity, Thermal Shock, High/Low Temperature -Storage/Operational
- Cycle Test: 30,000 cycles, Latch, Lock, and Docking Connector
- Electrostatic Discharge: ISO 10605
- Shock Crash Hazard: Test SAE J1455
- EMC Testing: EN 55032, EN50498
- · RoHS, FCC, CE, UKCA




FEATURES

- Compatible with the Dell Latitude 7230 and Pro Rugged 12 RA02260 tablets
- Accommodates the tablet's hand strap or magnet mount attachment
- Access to all tablet control buttons and ports while the tablet is docked
- Downward-facing I/O ports; integrated cable strain relief and cable management system
- One-handed docking and release for efficient use all day long
- Keyed lock for theft deterrence
- Gamber-Johnson rugged construction and reliability
- · Composite design for reduced weight and durability
- VESA 75 mounting pattern with 1/4-20 mounting studs for easy mounting with Gamber-Johnson mounts and motion attachments
- Optional QUAD RF pass through for enhanced connectivity
- Optional HDMI full port replication to connect a second display
- 3-Year Limited Warranty, Extended Warranty Program, and Gamber Guard Extended Service Plan available



DELL 12" RUGGED TABLET DOCKING STATION

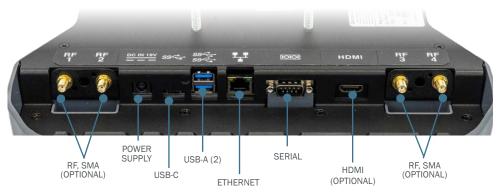





PORT REPLICATION

- USB-A 9-Pin (2) Fully powered (1.5 Amps each)
- USB-C (1) Fully powered (1.5 Amps)
- RJ45 Ethernet (1)
- RS232 Serial (1)
- Power Input: 19.5 Vdc
- Antenna: Quad RF (SMA) (optional)
- Display: HDMI 1.1 (optional)

PRODUCT SELECTION

| ITEM NUMBER | DESCRIPTION | COMPATIBLE DEVICES | POWERED USB 3.0 (1.5 AMPS) | USB-C (1.5 AMPS) | RS232 SERIAL | RJ-45 ETHERNET | HDMI 1.1 (1080P) | ANTENNA RF | POWER SUPPLY INCLUDED |
|--------------|--|---|----------------------------------|---------------------|-----------------|-------------------|---------------------|---------------|-----------------------------|
| 7160-1772-14 | Dell 12" Rugged Tablet Docking Station, Full Port - QUAD RF | Dell 7230 12" Rugged Extreme Tablet, Dell Pro | 2 | 1 | 1 | 1 | 1 | Quad (SMA) | No Yes |
| 7160-1772-10 | Dell 12" Rugged Tablet Docking Station, Full Port - NO RF | | | | | | | None | |
| 7160-1772-04 | Dell 12" Rugged Tablet Docking Station, Lite Port - QUAD RF | | | | | | 0 | Quad (SMA) | |
| 7160-1772-00 | Dell 12" Rugged Tablet Docking Station, Lite Port - NO RF | | | | | | | None | |
| 7170-1118-14 | Dell 12" Rugged Tablet Docking Station, Full Port - QUAD RF with Lind Auto Power Adapter | | | | | | 1 | Quad (SMA) | |
| 7170-1118-10 | Dell 12" Rugged Tablet Docking Station, Full Port - NO RF with Lind Auto Power Adapter | | | | | | | None | |
| 7170-1118-04 | Dell 12" Rugged Tablet Docking Station, Lite Port - QUAD RF with Lind Auto Power Adapter | Rugged 12 Tablet (RA02260) | | | | | 0 | Quad (SMA) | |
| 7170-1118-00 | Dell 12" Rugged Tablet Docking Station, Lite Port - NO RF with Lind Auto Power Adapter | | | | | | | | |
| 7160-1773-00 | Dell 12" Rugged Tablet Cradle (No electronics) - NO RF | | - | - | - | - | - | None | No |
| 7170-0992-00 | Dell 12" Rugged Tablet Cradle (No electronics) - NO RF with Lind Auto Power Adapter | | | | | | | | Yes |
| 7160-1811 | Dell 12" Rugged Tablet Keyboard Cradle (No electronics) - NO RF | | | | | | | | No |
| 7170-1002 | Dell 12" Rugged Tablet Keyboard Cradle (No electronics) - NO RF with Lind Auto Power Adapter | | | | | | | | Yes |