



INSTALLATION INSTRUCTIONS

Product

7160-1046

Ford F150 Transmission Hump Vehicle Base

Revision

Rev A


Form

INST-811

Printing Spec: PS-001

This instruction sheet is for the installation of the Ford F150 Transmission hump vehicle base.

Note: If the unit is being mounted in a vehicle with a 4 Wheel drive shift lever mounted on the transmission hump, then the Support Leg must be removed prior to installation of the mount.

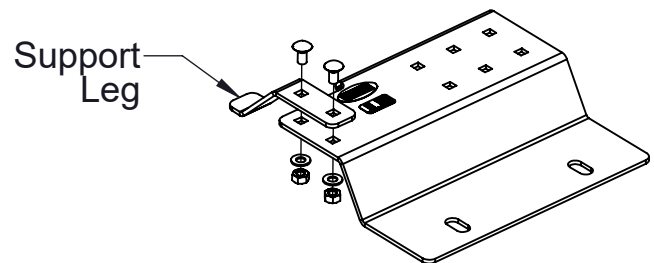



Step 1. Remove the passenger seat.

Step 2. Remove the center seat. There are 5 bolts that hold the center seat in place. 3 on the passenger side and 2 on the drivers side.

Step 3. Remove the center seat mounting bracket from the floor.

Step 4. Attach the pole to the mount using the hardware supplied with the pole.

Step 5. Reattach the center seat bracket, with the transmission hump vehicle base between the bracket and the floor.

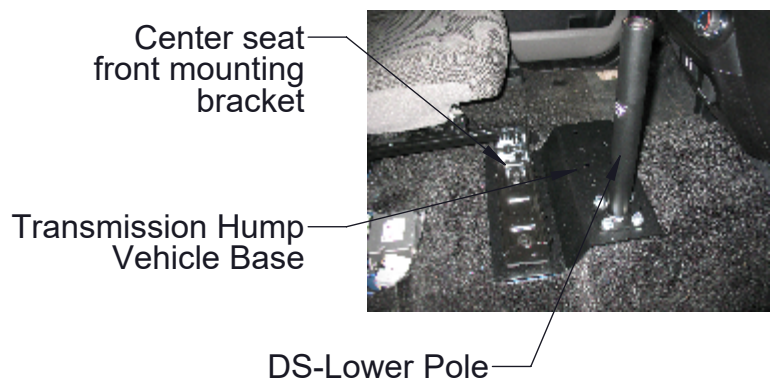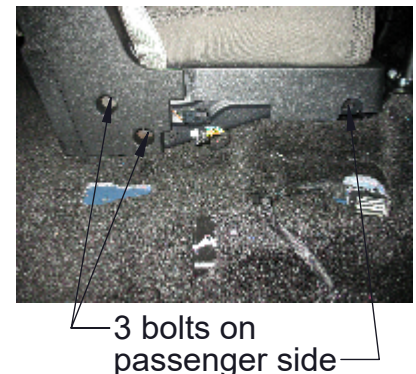

Step 6. Re-install the center and passenger seats.



Note: Gamber-Johnson has included a bracket for attaching a Support Brace (GJ# 7160-0230).

Attaching the support brace:

Step 1. Remove the lower trim panel. There is a screw on the drivers side and spring clips that hold it in place.

Step 2. Remove the (2) mounting screws on the passenger side and reattach with the support bracket mounted in place.

Step 3. Re-attach the lower trim panel.

Step 4. Attach the 7160-0230 support brace to the pole and the support bracket with the hardware supplied in hardware bag 7120-0802.



Lower Trim Panel

Mounting
Screws



Support Bracket

7160-0230
Support Brace
Lower Trim Panel
reattached





WARNING



- You must read and follow all of these installation instructions. Failure to follow all of these installation instructions may result in serious bodily injury or death.
- Keep these installation instructions with the product and readily available in the vehicle for future reference of other users of the product.
- Additional copies of the installation instructions can be obtained from Gamber Johnson.
- If you need assistance or have any questions, call Gamber-Johnson at 1-800-456-6868.
- Do not remove warning label from product under any circumstances.
- Before installation of any equipment always check area for routing of wires / cables and if drilling is required check area where drilling above and below the drilling area.
- High speed vehicle turns may cause a motion attachment product to swivel, interfering with the driver or other equipment.
- The Vehicle Base, Upper Pole, Motion Attachment and Dock or Cradle should not be positioned in the area where the airbag will be deployed if it is activated. DO NOT position the equipment in front of an airbag. Equipment positioned in front of an airbag can cause serious injury or death if an airbag was activated, such as in an accident.
- The installer and user of this product(s) are responsible for installing and using Upper Pole, Motion Attachment and Dock or Cradle assemblies outside the airbag deployment zone. (See Product Mounting Disclaimer Below)
- If installation of the equipment requires that the equipment be placed in front of an airbag, deactivate the airbag in the vehicle so it cannot be activated in an accident. In order to secure permission for deactivating the airbag in these circumstances, contact the National Highway Traffic Safety Administration at 1-800-424-9393 to gain permission to do so. If you have any questions or need assistance, call Gamber Johnson at 1-800-456-6868.