

INSTALLATION INSTRUCTIONS

ProductRevisionForm7160-1939Rev BINST-1196

SAMSARA CM31,32, 33, & 34 SUCTION CUP MOUNT Printing Spec: PS-001

This instruction sheet is for mounting a Samsara CM31,32,33, & 34 suction cup mount in a vehicle. Gamber-Johnson suction cups are compatible with smooth, non-porus surfaces (no rough or textured surfaces). Clean surface thoroughly before applying suction. When left unattended in extreme temperatures, it is recomended to stow the suction cup. Suction cups are considered a general wear item and are not covered under any warranty.

Note: a lanyard (supplied by others) can be employed to attach the mount to a higher point in the vehicle for added safety.

Attaching the Samsara CM31 & 32 camera to the suction cup mount: See page 2

- 1. Attach the Samsara camera to the camera bracket with the hardware found in hardware bag # 7120-1212. Insert the camera between the camera bracket ears with the (2) #10 rubber washers between the camera and the bracket ears.
- 2. Insert the (2) M4 screws, lock washers, and flat washers through the bracket and into the camera to hold it in place. Adjust the camera angle to the desired location and tighten the screws in place.


Attaching the Samsara CM33 & 34 camera to the suction cup mount:

1. Insert the camera between the camera bracket ears with the (2) #10 rubber washers found in hardware bag # 7120-1212 between the camera and the bracket ears. Attach with the M5 screws supplied with the camera.

Product Mounting Disclaime

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

CM31, & 32

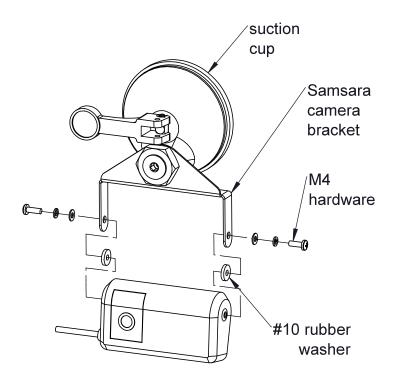



CM33, & 34



M5 screws supplied with the camera

rubber washer betweencamera and bracket