

# INSTALLATION INSTRUCTIONS

## Product

2004+ Ford F150 DS-Base  
DS-124

## Revision

Rev B


## Form #

INST-193

The DS-124 (2004 or newer Ford F150 base) is a No-Holes-Bored base. The base mounts under the seat bracket and is compressed to the floor using the seat bolts.

### Mounting the DS-124 to the passenger seat:

1. Attach the DS-Step to the lower bracket with the 3/8" carriage bolts, flat washers, and nuts.
2. Dis-connect and set aside any covers over the passenger seat front and rear bolts.
3. Remove the two *front* seat bolts that attach the passenger seat to the floor. Loosen the two *rear* seat bolts that attach the passenger seat to the floor.
4. Lift upward on the front of the passenger seat and slide the lower bracket under the seat until the slots in the lower bracket line up with the holes for the seat bolts. Lower the seat back into position.
5. Install the two front seat bolts that you removed in step 3. Tighten the two rear seat bolts that were loosened in step 3. The lower bracket should now be compressed between the seat and the floor.
6. Install and secure any covers that were set aside.

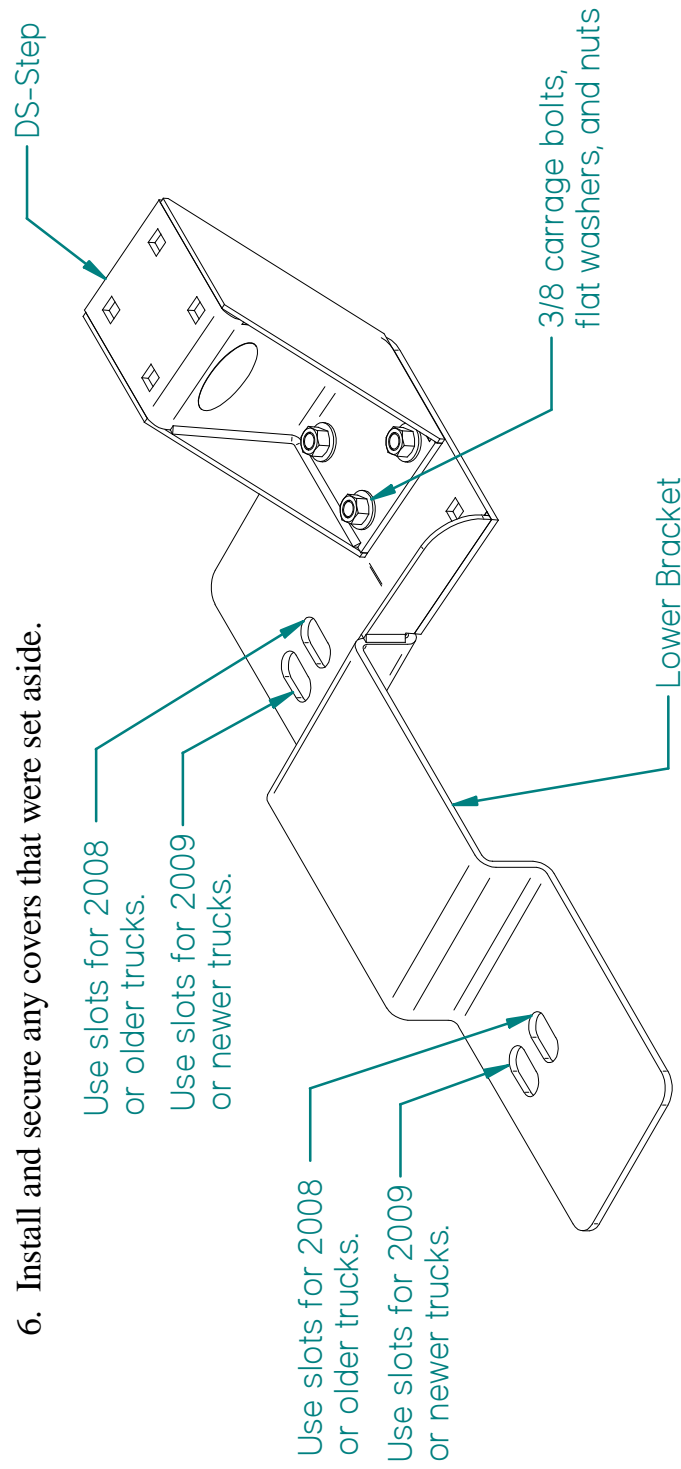

ITEM	QTY	PART NO.	DESCRIPTION
1	1	11728	2004 FORD F150 DS-BASE
2	1	11519	3.50 X 4 OFFSET RISER
3	1	8700-0010	LABEL, COMPANY
4*	2	7120-0113	HARDWARE BAG
5*	1	INST-193	INST_DS-124,2004+ F-150 Base

