



Very Well Connected™

INSTALLATION INSTRUCTIONS

Product

7160-0911, 7160-0920

**Workstation Console Box
Workstation Console Box Ledge**

Revision

B

Form


INST-766

Printing Spec:PS-001

The Workstation Console Box can be installed on a top plate or a large workstation console box ledge. The ledge is attached to the front of a large workstation with (4) 1/4-20unc x 5/8" long hex bolts, lock washers, and flat washers (see below).

To attach the console box to the top plate or ledge:

1. Mount the top plate or ledge in the vehicle in its approximate final position.
2. Insert (4) 1/4-20 x 1.00 carriage bolts provided in the hardware bag from the bottom side through the top plate and slots in the bottom of the console box.
3. Fasten the box to the plate using the flat washers, lock washers and 1/4-20 hex nuts remaining in the hardware bag. See images below.
4. If mounting the console box on a top plate in front of a small workstation, the console box can be attached to the small workstation with (2) 1/4-20 hex bolts and flat washers.

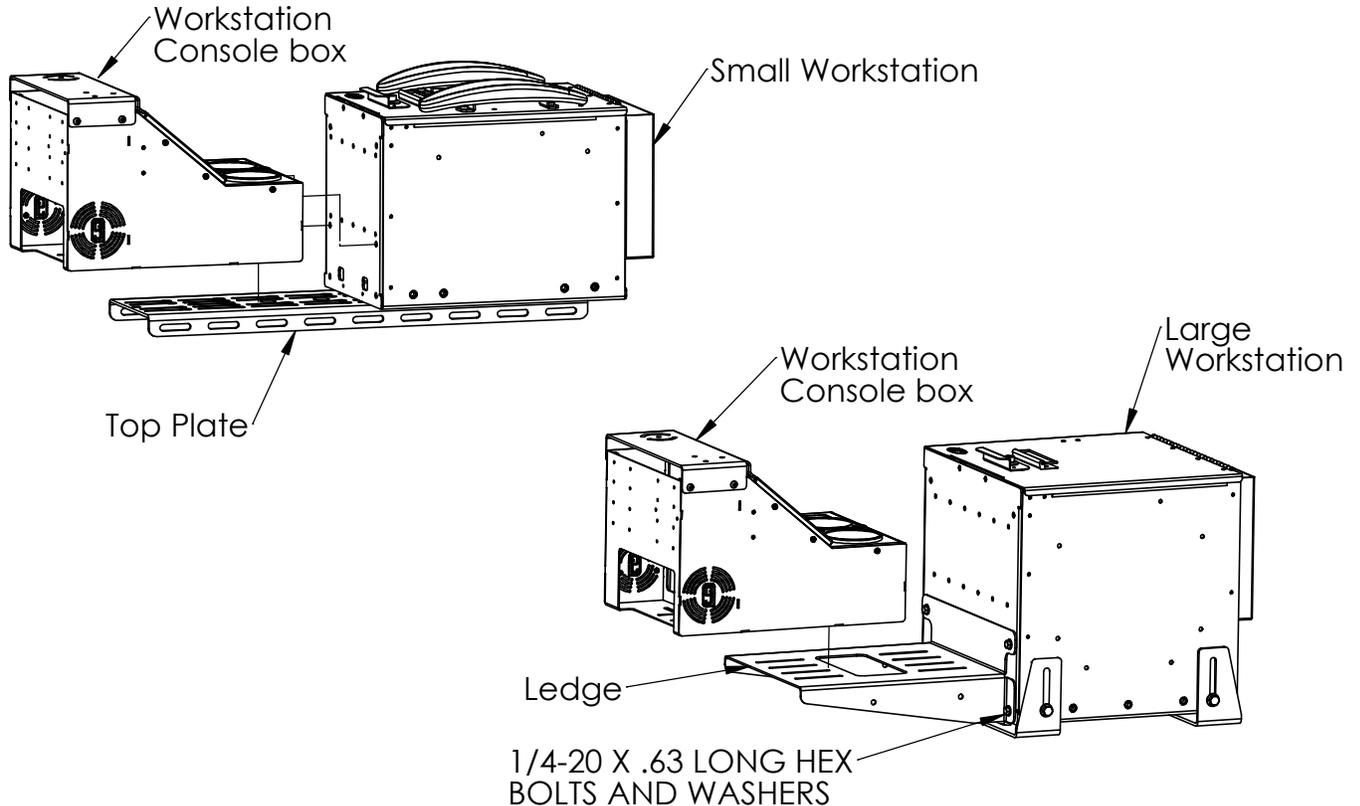


Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.


© copyright 2016 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

The workstation console box has an access door on the passenger side of the console box. There is a bracket mounted in the horizontal orientation for attaching a fuse block or wire harness. The internal bracket can be repositioned to the vertical orientation by the end user if required.

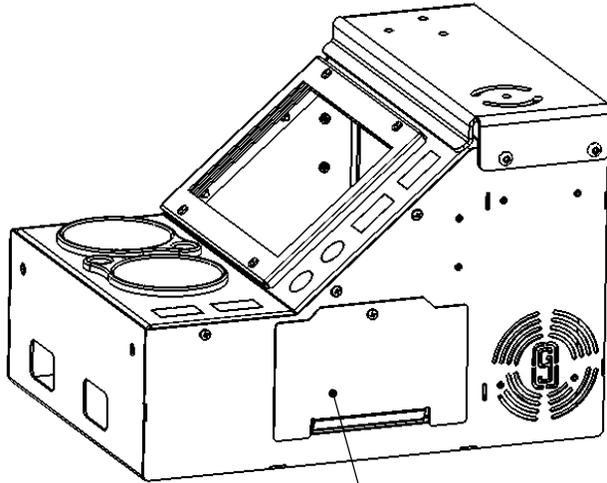


Access Door

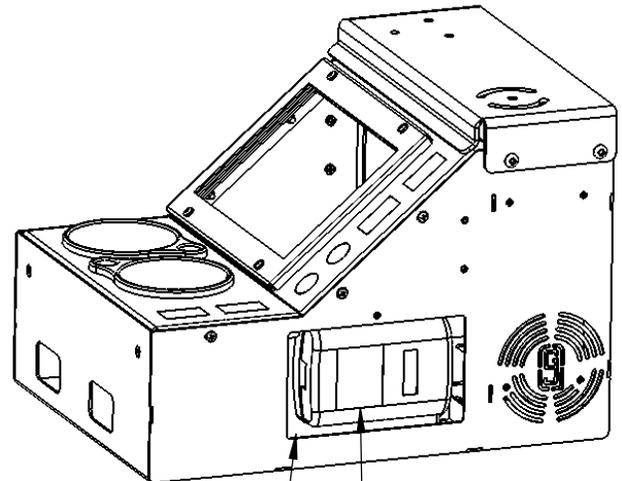

Fuse Block
(shown for ref. only)

internal bracket can be repositioned to the vertical orientation by end user

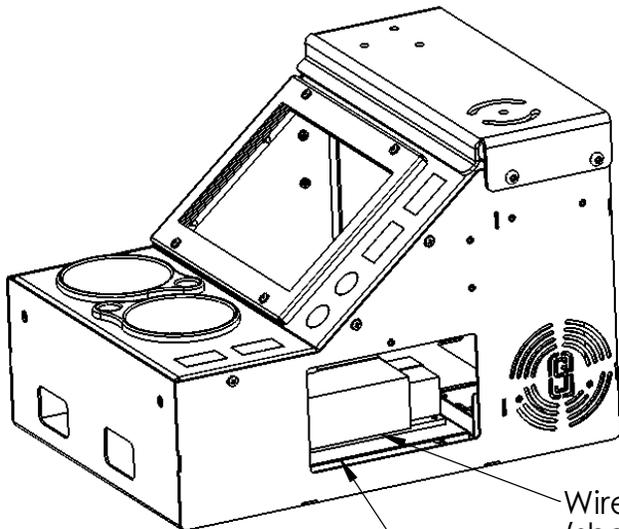

Wire Harness / Fuse Block
(shown for ref. only)

Standard setup with internal bracket in horizontal orientation