



Very Well Connected™

# INSTALLATION INSTRUCTIONS

## Product

**7160-0510**

**Vehicle Base, GMC TRUCK, 2014**

## Revision


Rev.D

## Form

INST-609

**Printing Spec: PS-004**

- You must read and follow all of these installation instructions. Failure to follow the installation instructions may result in serious bodily injury or death
- DO NOT install or use this assembly in the area in which the airbag on the vehicle may be deployed. The installer and user of this assembly are responsible for installing and using this assembly outside the area in which an airbag may be deployed. (See Product Mounting Disclaimer Below)
- Keep these installation instructions with the product and readily available in the vehicle for future reference of other users of the product.
- Additional copies of the installation instruction can be obtained from Gamber-Johnson. If you need assistance or have any questions, go to [www.gamberjohnson.com](http://www.gamberjohnson.com) or call Gamber-Johnson at 1-800-456-6868.
- DO NOT remove the warning label from the product under any circumstances.

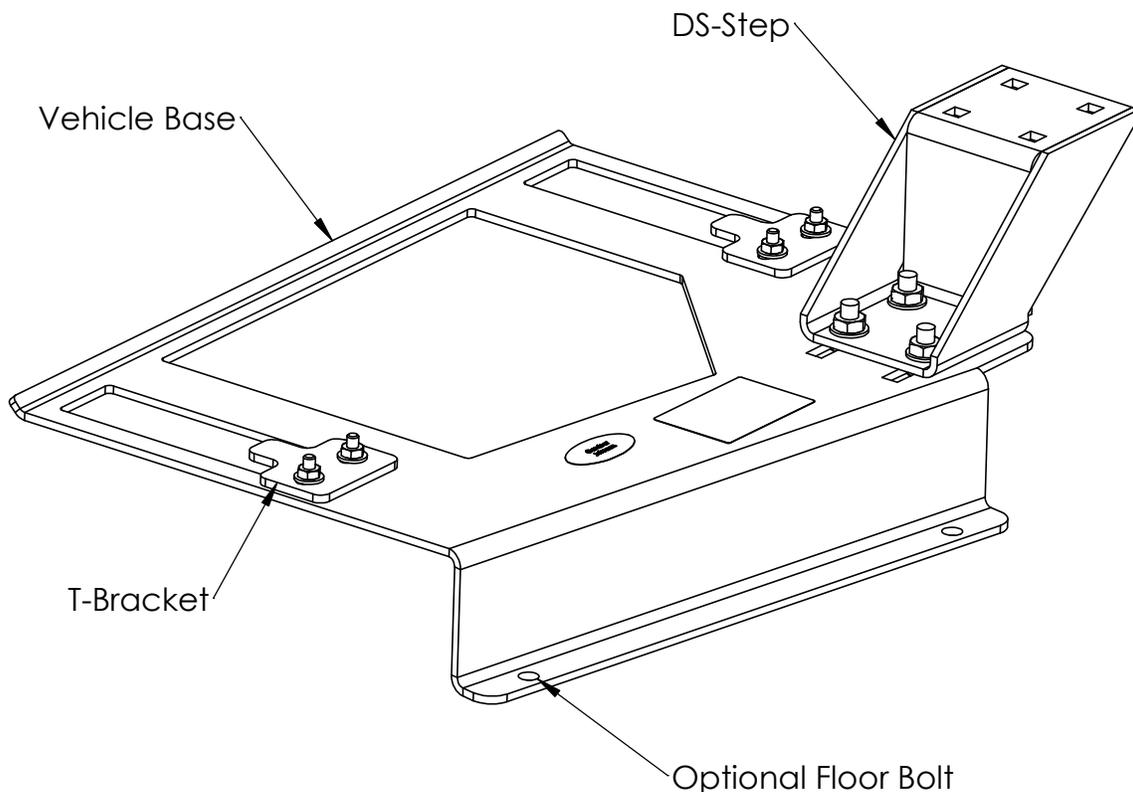

### Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2018 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

### Remove Front Passenger Seat:

1. Remove the plastic trim pieces from the passenger seat that cover the front hooks, rear seat bolts, and the side of the seat. See Figure 1.
2. Remove the rear seat bolts with a T50 bit.
3. Disconnect the yellow cable connector assembly from the side of the seat under the seat rail. See Figure 2.
4. Lean seat forward and slide out of the front hook slots, and set seat out of the way.



Figure 1.



Figure 2.

### Install Vehicle Base:

1. Set vehicle base in place to allow seat hooks to slide through the large holes in the base. See Figure 3.
2. Hook seat back into slots. See figure 4.
3. Replace rear seat bolts.
4. Install T-Brackets using provided hardware. The tab of the bracket will be between the vehicle base and the seat rail. See Figure 5.
5. Attach the DS-Step with the hardware provided.
6. Plug in the yellow cable assembly that was disconnected earlier.
7. The trim will not fit with base installed. It could be modified to fit or left off. (Up to customer)



Figure 3.



Figure 4.



Figure 5.

# WARNING

- This assembly should not be positioned in the area where the airbag may be deployed.
- DO NOT position the equipment in front of an airbag. Equipment positioned in front of an airbag may cause serious injury or death if an airbag is activated.
- If installation of the equipment requires that the equipment be placed in front of an airbag, the airbag should be deactivated. In order to secure permission for deactivating the airbag you must contact the National Highway Traffic Safety Administration at 1-800-424-9393 to gain permission to do so. If you have any questions or need assistance, call Gamber-Johnson at 1-800-456-6868.
- High speed vehicle turns may cause parts of the assembly to swivel, interfering with the driver or other equipment.